




CAT6 2X4P U/UTP E-Slim LSZH Dca AWG24 White cable (500 m Drum)

GGM C6UHR2X4WT5

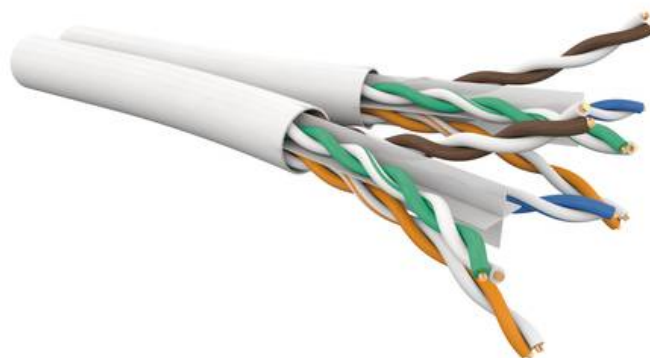

GIGAMEDIA CAT6 solution is designed to meet and exceed the performance levels described in the published cabling standards ISO/ IEC 11801, and ANSI/TIA/EIA 568C series and EN50173-1. The performance headroom provided makes it a reliable and safe choice to support all Class E applications including Gigabit Ethernet and PoE.

New Dual Slim version is available!

- Packing : 500 m
- Single and Dual construction available
- White RAL9010
- Standards:
 - ANSI/TIA-568-C.2,
 - EN 50173,
 - ISO/IEC 11801
- Applications:
 - IEEE 802.3 : 10Base-T ; 100Base-T ; 1000Base-T
 - IEEE 802.3at/af (PoE/PoE+)
- Jacket: LSZH (IEC 60332-1) Dca s2, d2, a1
- Outer jacket diameter : 5,4 x 11,1 mm
- Characteristic impedance: 100 ?
- Nominal velocity of propagation: 67 %
- Conductor bare copper wire, 24 AWG