


Sensor-switched indoor light

RS 14 L

EAN 4007841 731113

STEINEL[®]
PROFESSIONAL



max.60w



high frequency
sensor 360°



Ø 1 - 8 m



IP44



2 - 2000 lux



5 sec - 15 min



shock proof IK07



energy saving



5 JAHRE
HERSTELLER
GARANTIE
steinel-professional.de/garantie



CE

Function description

Taking it easy. High-frequency SensorLight RS 14 L, ideal for stairwells and corridors, for E 27 lamps, impact-resistant plastic shade, 360° detection, reach infinitely variable from 1 – 8 m, selectable time and twilight threshold.

Technical specifications

Dimensions (Ø x H)	280 x 110 mm
Mains power supply	230 – 240 V / 50 Hz
Sensor Technology	High frequency
Transmitter power	< 1 mW
Output	60 W
Interconnection	Yes
Switching output 1, resistive	800 W
With lamp	No
Lamp	All-purpose lamp
Base	E27
With motion detector	Yes
Detection	also through glass, wood and stud walls
Detection angle	360 °
Angle of aperture	160 °
Electronic scalability	Yes

Mechanical scalability	No
Reach, radial	Ø 8 m (50 m²)
Photo-cell controller	Yes
Twilight setting	2 – 2000 lx
Time setting	5 s – 15 Min.
Impact resistance	IK07
IP-rating	IP44
Protection class	II
Ambient temperature	-20 – 40 °C
Housing material	Aluminium
Cover material	Plastic, opal
Manufacturer's Warranty	5 years
Settings via	Potentiometers
PU1, EAN	4007841731113


Sensor-switched indoor light

RS 14 L

EAN 4007841 731113


STEINEL[®]
PROFESSIONAL

Detection Zone

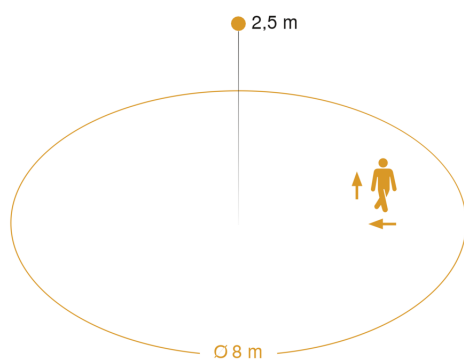

Mögliche Montagehöhe: 2,00 m – 4,00 m
Orange: radial und tangential

Light Distribution Curve



Output
With lamp
Lamp

60 W
No
All-purpose lamp

Master circuit diagram

