


Sensor-switched indoor light

RS LED D2 Z-Wave

EAN 4007841 029852

STEINEL®
Intelligent technology



11w

11 W 600 lm



3000K warm-white



high frequency
sensor 360°



Ø 3 - 8 m



2 - 2000 lux



5 sec - 15 min



energy saving



3 JAHRE
HERSTELLER
GARANTIE
steinel.de/garantie



CE



TÜV Nord GS

Function description

Shining light. STEINEL high-frequency sensor-switched indoor light RS LED D2 Z-Wave, can be integrated into the Smart Friends system or any other Z-Wave network, with brushed stainless-steel surround, ideal for corridors, hallways, stairwells and bathrooms. 11 W for 600 lm of light, STEINEL LED lighting system, 360° high-frequency sensor with 3-8 m reach, switches light ON without a sound, with ambient light.

Technical specifications

Dimensions (L x W x H)	300 x 300 x 66 mm
Mains power supply	220 – 240 V / 50 – 60 Hz
Sensor Technology	High frequency
Transmitter power	< 1 mW
Output	11 W
Interconnection	Yes
Luminous flux	600 lm
Colour temperature	3000 K
Colour variation LED	SDCM3
Colour Rendering Index CRI	80-89
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
Drop in luminous flux in accordance with LM80	L70B10
Base	without
LED cooling system	Passive Thermo Control
With motion detector	Yes
Detection	also through glass, wood and stud walls

Detection angle	360 °
Angle of aperture	160 °
Electronic scalability	Yes
Mechanical scalability	No
Reach, radial	Ø 8 m (50 m²)
Photo-cell controller	Yes
Twilight setting	2 – 2000 lx
Time setting	5 s – 15 Min.
Impact resistance	IK03
IP-rating	IP20
Protection class	II
Ambient temperature	-10 – 40 °C
Transmitter range	Up to 100 m in the open, 30 m indoors
Housing material	Plastic
Cover material	Plastic, opal
Manufacturer's Warranty	3 years
Settings via	Potentiometers, Z-Wave
PU1, EAN	4007841029852

<https://www.steinel.de>

Sensor-switched indoor light

RS LED D2 Z-Wave


EAN 4007841 029852



Accessories

EAN 4007841 029876 Smartfriends Box

Detection Zone

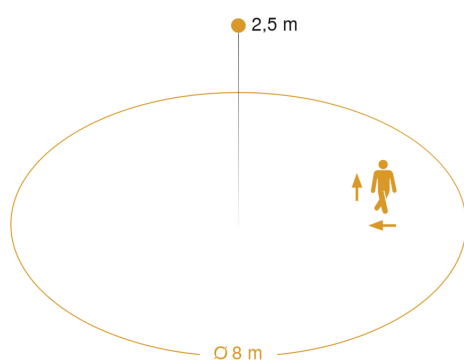

Mögliche Montagehöhe: 2,00 m – 4,00 m
Orange: radial und tangential

Dimension Drawing

