


Sensor-switched indoor light

RS PRO LED S2

V4 PC warm white

EAN 4007841 035792



LED

30 years (Ø 4,5h / day)



3000K warm-white



high frequency sensor 360°



1 - 8 m



2 - 2000 lux



5 sec - 15 min



networkable wireless



energy saving

5 JAHRE
HERSTELLER
GARANTIE

manufacturer's warranty
steinel-professional.de/garantie



Function description

The smartest light in the world. High-frequency sensor-switched light RS PRO LED S2, ideal for office corridors, passageways, WC facilities, stairwells, can be wirelessly interconnected with RS PRO LED S1 and S2, 26 W LED/2106 lm, polycarbonate shade, 3000 K, 360° detection, reach 1 – 8 m, basic light-level function, presence mode and neighbouring light function.

RS PRO LED S2

V4 PC warm white

EAN 4007841 035792

Technical specifications

Dimensions (Ø x H)	350 x 83 mm
Mains power supply	230 – 240 V / 50 – 60 Hz
Sensor Technology	High frequency
Transmitter power	< 1 mW
Output	26 W
Interconnection	Yes
Luminous flux	2106 lm
Colour temperature	3000 K
Colour variation LED	SDCM3
Colour Rendering Index CRI	80-89
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	70000 h
Drop in luminous flux in accordance with LM80	L80B10
Base	without
LED cooling system	Active Thermo Control
With motion detector	Yes
Detection	also through glass, wood and stud walls
Detection angle	360 °
Angle of aperture	160 °
Electronic scalability	Yes
Mechanical scalability	No

Reach, radial	Ø 8 m (50 m ²)
Reach, tangential	Ø 8 m (50 m ²)
Main light adjustable	10 - 100 %
Continuous light	selectable, 4h
Photo-cell controller	Yes
Twilight setting	2 – 2000 lx
Time setting	5 s – 15 Min.
Basic light level function	Yes
Basic light level function time	all night, 10/30 min
Functions	Neighbouring-group function, Presence function, Group parameterisation, Manual ON / ON-OFF
Soft light start	Yes
Impact resistance	IK07
IP-rating	IP20
Protection class	II
Ambient temperature	-10 – 50 °C
Housing material	Aluminium
Cover material	Plastic, opal
Manufacturer's Warranty	5 years
Settings via	DIP switches, Potentiometers, Remote control, Smart Remote
Version	PC warm white
PU1, EAN	4007841035792

Accessories

EAN 4007841 009151	Remote control Smart Remote
--------------------	-----------------------------

Sensor-switched indoor light


RS PRO LED S2

V4 PC warm white

EAN 4007841 035792




Detection Zone

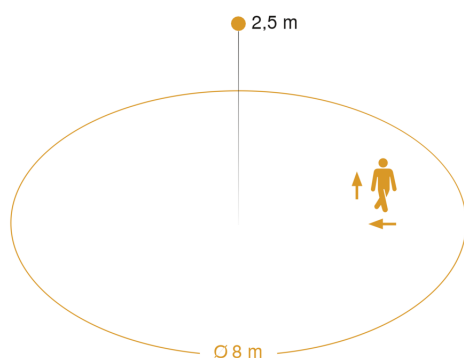


Mögliche Montagehöhe: 2,00 m – 4,00 m

Orange: radial und tangential

Dimension Drawing

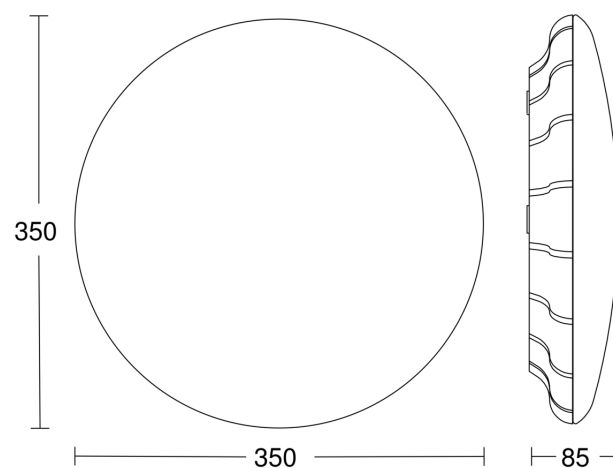


Light Distribution Curve



Output	26 W
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
Luminous flux	2106 lm
Colour temperature	3000 K
Colour Rendering Index CRI	80-89
LED life expectancy (max. °C)	70000 h
LED cooling system	Active Thermo Control

Slave/wireless master interconnection circuit diagram



Sensor-switched indoor light

RS PRO LED S2

V4 PC warm white

EAN 4007841 035792



Master/master interconnection circuit diagram

