


Sensor-switched indoor light

RS PRO LED S2 IP65

V4 Neutral white

EAN 4007841 055820

STEINEL[®]
PROFESSIONAL



LED

30 years (Ø 4,5h / day)



4000K neutral white



high frequency sensor 360°



1 - 8 m

IP65

IP65 Dust-proof and jet water protected



2 - 2000 lux



5 sec - 15 min



shock proof IK10



networkable wireless



energy saving

Function description

A shining light. In terms of strength and ease of installation. High-frequency SensorLight RS PRO LED S2 IP65, ideal for swimming pools, hotels, changing and shower areas, thoroughfares in industrial buildings and pedestrian subways, can be wirelessly interconnected with RS PRO LED S1, S2 IP65, 2010 lm, 4000 K, impact-resistant and opal polycarbonate shade, IK10, 360° detection, reach from 1 – 8 m, basic light-level function, presence mode and neighbouring light function.

Sensor-switched indoor light

RS PRO LED S2 IP65

V4 Neutral white

EAN 4007841 055820

STEINEL[®]
PROFESSIONAL

Technical specifications


Dimensions (Ø x H)	362 x 82 mm
Mains power supply	220 – 240 V / 50 – 60 Hz
Sensor Technology	High frequency
Transmitter power	< 1 mW
Output	26 W
Interconnection	Yes
Luminous flux	2010 lm
Colour temperature	4000 K
Colour variation LED	SDCM3
Colour Rendering Index CRI	80-89
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	70000 h
Drop in luminous flux in accordance with LM80	L80B10
Base	without
LED cooling system	Active and Passive Thermo Control
With motion detector	Yes
Detection	also through glass, wood and stud walls
Detection angle	360 °
Angle of aperture	160 °

Electronic scalability	Yes
Mechanical scalability	No
Reach, radial	Ø 8 m (50 m²)
Reach, tangential	Ø 8 m (50 m²)
Photo-cell controller	Yes
Twilight setting	2 – 2000 lx
Time setting	5 s – 15 Min.
Basic light level function	Yes
Basic light level function time	10/30 min, all night
Functions	Neighbouring-light function, Presence function
Impact resistance	IK10
IP rating	IP65
Protection class	II
Ambient temperature	-10 – 50 °C
Housing material	Aluminium
Cover material	Plastic, opal
Manufacturer's Warranty	5 years
Version	Neutral white
PU1, EAN	4007841055820

Accessories


EAN 4007841 009151 Remote control Smart Remote

Detection Zone

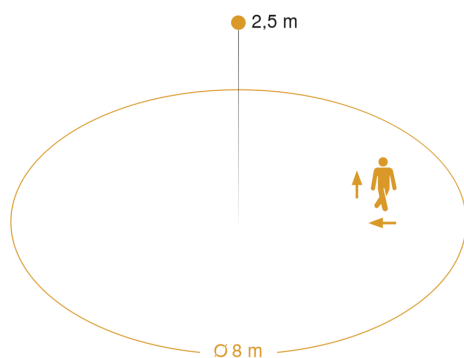

Mögliche Montagehöhe: 2,00 m – 4,00 m
Orange: radial und tangential

Dimension Drawing

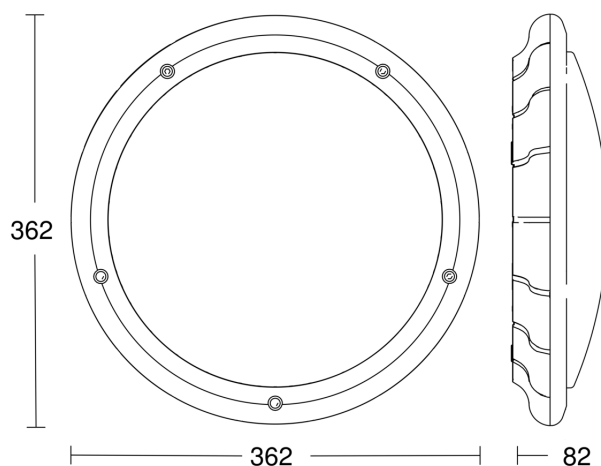

<https://www.steinell.de>

Sensor-switched indoor light


RS PRO LED S2 IP65

V4 Neutral white

EAN 4007841 055820




Light Distribution Curve



Output	26 W
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
Luminous flux	2010 lm
Colour temperature	4000 K
Colour Rendering Index CRI	80-89
LED life expectancy (max. °C)	70000 h
LED cooling system	Active and Passive Thermo Control

Slave/wireless master interconnection circuit diagram



Master/master interconnection circuit diagram

