


Sensor-switched indoor light

RS LED D1

V3

EAN 4007841 052522

STEINEL®
Intelligent technology



LED



30 years (Ø 4,5h / day)



high frequency sensor 360°



Ø 3 - 8 m



2 - 2000 lux



5 sec - 15 min



manual override



indoor



energy saving



3 JAHRE
HERSTELLER
GARANTIE
steinel.de/garantie

manufacturer's
warranty
steinel.de/garantie

Function description

Radiant eye-catcher. STEINEL high-frequency sensor-switched indoor light RS LED D1 with chrome-plated metal surround, ideal for corridors, hallways, stairwells and bathrooms. STEINEL LED lighting system, 9,5 W with 795 lm, 360° high-frequency sensor with 3-8 m reach, switches light ON without a sound, with ambient light, Night-light function and 4-hour manual override (3000 K).

Technical specifications

Dimensions (L x W x H)	300 x 300 x 66 mm
Mains power supply	220 – 240 V / 50 – 60 Hz
Sensor Technology	High frequency
Output	9,5 W
Interconnection	No
Luminous flux	795 lm
Colour temperature	3000 K
Colour variation LED	SDCM3
Colour Rendering Index CRI	80-89
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
Base	without
LED cooling system	Passive Thermo Control
With motion detector	Yes
Detection	also through glass, wood and stud walls
Detection angle	360 °
Angle of aperture	160 °
Electronic scalability	Yes

Mechanical scalability	No
Reach, radial	Ø 8 m (50 m²)
Continuous light	selectable, 4h
Photo-cell controller	Yes
Twilight setting	2 – 2000 lx
Time setting	5 s – 15 Min.
Basic light level function	Yes
Basic light level function time	10/30 min, all night
Soft light start	No
Impact resistance	IK03
IP-rating	IP20
Protection class	II
Ambient temperature	-10 – 40 °C
Housing material	Plastic
Cover material	Plastic, opal
Manufacturer's Warranty	3 years
Settings via	Potentiometers
PU1, EAN	4007841052522

<https://www.steinel.de>

Sensor-switched indoor light


RS LED D1

V3

EAN 4007841 052522



Detection Zone

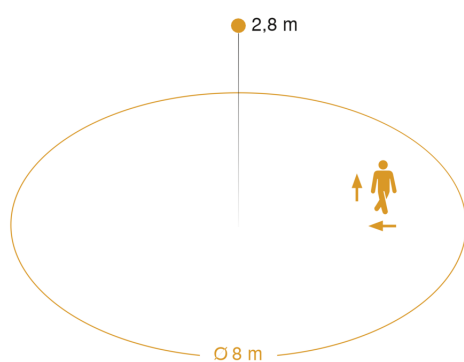

Mögliche Montagehöhe: 2,00 m – 4,00 m
Orange: radial und tangential

Dimension Drawing

