


Sensor-switched indoor light

RS LED M2

V2 Chrome

EAN 4007841 052508

STEINEL®
Intelligent technology



LED

30 years (Ø 4,5h / day)



3000K warm-white



high frequency sensor 360°



Ø 3 - 8 m



2 - 2000 lux



5 sec - 15 min



manual override



indoor



energy saving



3 JAHRE
HERSTELLER
GARANTIE
steinel.de/garantie
manufacturer's
warranty
steinel.de/garantie

Function description

Make elegant statements. Translucent RS LED M2 indoor LED lights for ceiling and wall. With an impressive 873 lm for classy ambient light at a power consumption of just 9,5 W. Integrated high-frequency sensor with an angle of coverage of 360° and reach of up to Ø 6 m. Night-light function and 4-hour manual override (3000 K). Available in either chrome or silver.

Technical specifications

Dimensions (L x W x H)	220 x 220 x 67 mm
Mains power supply	220 – 240 V / 50 – 60 Hz
Sensor Technology	High frequency
Output	9,5 W
Interconnection	Yes
Luminous flux	873 lm
Colour temperature	3000 K
Colour variation LED	SDCM3
Colour Rendering Index CRI	80-89
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	65000 h
Drop in luminous flux in accordance with LM80	L70B10
Base	without
With motion detector	Yes
Detection	also through glass, wood and stud walls
Detection angle	360 °
Angle of aperture	160 °
Electronic scalability	Yes

Mechanical scalability	No
Reach, radial	Ø 8 m (50 m²)
Continuous light	selectable, 4h
Photo-cell controller	Yes
Twilight setting	2 – 2000 lx
Time setting	5 sec. – 15 min
Basic light level function	Yes
Basic light level function time	10/30 min, all night
Soft light start	No
Impact resistance	IK03
IP-rating	IP20
Protection class	II
Ambient temperature	-10 – 30 °C
Housing material	Plastic
Cover material	Plastic, opal
Manufacturer's Warranty	3 years
Settings via	Potentiometers
Version	Chrome
PU1, EAN	4007841052508

<https://www.steinell.de>

Sensor-switched indoor light


RS LED M2

V2 Chrome

EAN 4007841 052508



Detection Zone

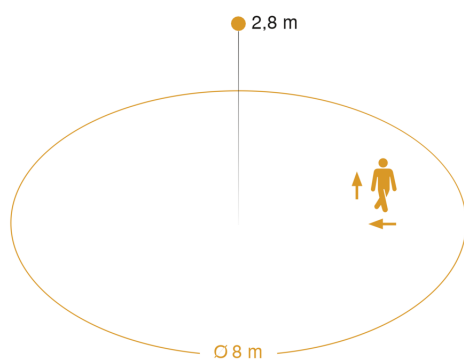

Mögliche Montagehöhe: 2,00 m – 4,00 m
Orange: radial und tangential

Dimension Drawing

