

Transformer:
BT 348
Primary supply: 230V
Secondary: 48V
1440VA = 3 x 480W

Cable: RK 2x2.5mm²
Plug Schuko 230V/16A

3 outlet terminals 1/0A

Alt. 1

Terminal "Scotchlock wiring connector"
3M 562 yellow
(Not necessary to cut the cables)




Alt. 2

Terminal block
Wago type 222-413
3 conductors, 2.5-4mm²

Alt. 3

Twist Wire connectors
Torix T6/T16

BOJ 48/23:
BOJ 48/12 LED:
EBL BOJ 48/20:
Maximum of 90 metres of cable
per string 2x2.5mm²
Transformer supply voltage 48V.
Lowest voltage at each light must be
no lower than -10% (43.2V).

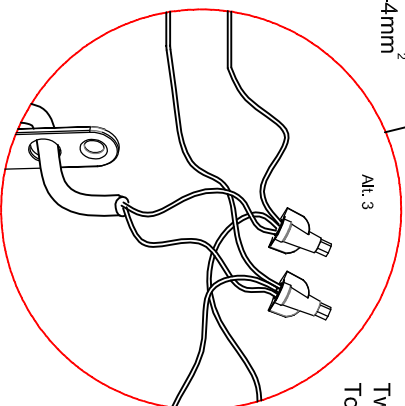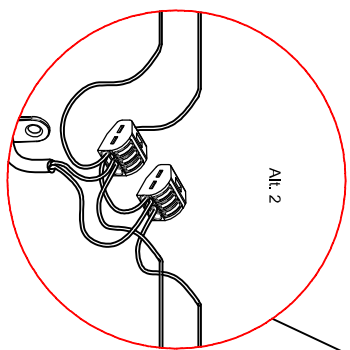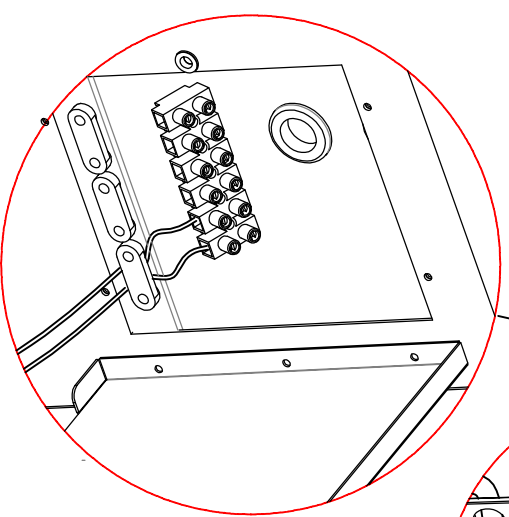

Each transformer BT 348 can supply maximum 3x12 = 36 lamps (BOJ 48/23)
Each transformer BT 348 can supply maximum 3x24 = 72 lamps (BOJ 48/12 LED)
Each transformer BT 348 can supply maximum 3x15 = 45 lamps (EBL BOJ 48/20)

Den här ritning är El-Björns egendom.
Ritningen får ej kopieras eller visas
utan vårt medgivande.

SYSTEM EL-BJÖRN						Anm.	
Delnr	Ant.	Material				Ersätter	Ersät av
Konstr.	Ritad	Kop.	Kontr.	Stand	Godk.	Skad	
						1 : 9	
BOJ 48/23, BOJ 48/12LED EBL BOJ 48/20						Filmarn	Dat. 20141215
						Ritarn	Anvisning BOJ-upp...