


Sensor-switched LED outdoor light

DL Vario Quattro LED

Anthracite

EAN 4007841 057602

Article number 057602



LED

30 years (Ø 4,5h / day)

3000 K

3000K warm-white



infrared sensor ideal 12 x 12 m



Scalable in every direction



IP54



2 - 1000 lux



5 sec - 30 min



soft light start



manual override 4h



indoor/outdoor light

Function description

Detects precisely where you want it to. Sensor-switched ceiling light providing reliable 360° all-round detection. Precise definition of the sensor detection zone in four directions thanks to four individually adjustable infrared sensors with a reach from 2 to 8 m. No visible sensor to spoil the design because the light diffuser is also the sensor lens – a patented world first 1000 lm at 9,8 W. With night-light function (10%). Max. mounting height: 6 m.

DL Vario Quattro LED

Anthracite

EAN 4007841 057602


Article number 057602

Technical specifications

| | |
|---|--------------------------|
| Dimensions (Ø x H) | 310 x 69 mm |
| Mains power supply | 220 – 240 V / 50 – 60 Hz |
| Mounting height max. | 6,00 m |
| Sensor Technology | passive infrared |
| Output | 9,8 W |
| Interconnection | No |
| Slave modeselectable | No |
| Luminous flux | 1000 lm |
| Efficiency | 100 lm/W |
| Colour temperature | 3000 K |
| Colour variation LED | SDCM3 |
| Colour Rendering Index | 80-89 |
| With lamp | Yes, STEINEL LED system |
| Lamp | LED cannot be replaced |
| LED life expectancy (max. °C) | 50000 h |
| LED life expectancy (25 °C) | > 60000 h |
| Base | without |
| LED cooling system | Passive Thermo Control |
| With motion detector | Yes |
| Detection angle | 360 ° |
| Angle of aperture | 180 ° |
| Sneak-by guard | Yes |
| Capability of masking out individual segments | No |

| | |
|---------------------------------|---|
| Electronic scalability | No |
| Mechanical scalability | No |
| Reach, detail | Reach adjustable from 2 – 8 m in 4 directions (90° in each) |
| Reach, radial | 4 x 4 m (16 m ²) |
| Reach, tangential | 16 x 16 m (256 m ²) |
| Photo-cell controller | Yes |
| Twilight setting | 2 – 1000 lx |
| Time setting | 5 s – 30 Min. |
| Basic light level function | Yes |
| Basic light level function time | 10/30 min, all night |
| Soft light start | Yes |
| Continuous light | selectable, 4h |
| Impact resistance | IK07 |
| IP-rating | IP54 |
| Protection class | II |
| Ambient temperature | -20 – 35 °C |
| Housing material | Plastic |
| Cover material | Plastic, structured |
| Manufacturer's Warranty | 3 years |
| Settings via | Potentiometers |
| With remote control | No |
| Version | Anthracite |
| PU1, EAN | 4007841057602 |

Detection Zone




Mögliche Montagehöhe: 2,00 m – 6,00 m

Orange: radial

Schwarz: tangential

4 skalierbare Zonen

Dimension Drawing

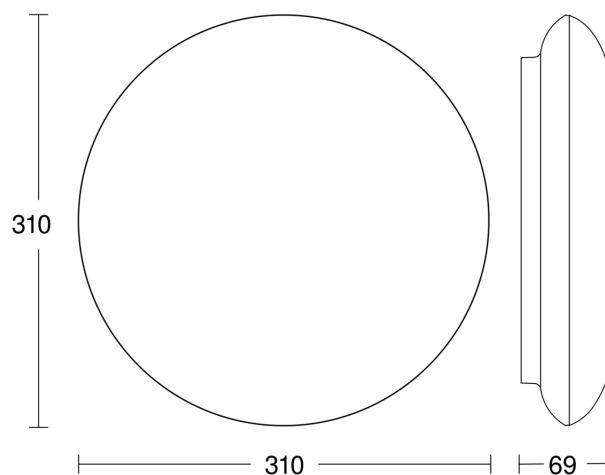

Sensor-switched LED outdoor light

DL Vario Quattro LED

Anthracite

EAN 4007841 057602

Article number 057602



Circuit diagram

