

Sensor-switched LED outdoor light - Professional Line

DL Vario Quattro PRO LED

Neutral white silver

EAN 4007841 035495

Article number 035495



LED

30 years (Ø 4,5h /
day)

4000 K

4000K neutral
white



infrared sensor
ideal 12 x 12 m



Scalable in every
direction



IP54



2 - 1000 lux



5 sec - 30 min



soft light start



manual override
4h



networkable via
cable

Function description

Detects precisely where you want it to. No more irritating inadvertent triggering. Four precision infrared sensors guarantee 360° all-round detection and can be adjusted in four directions to accommodate any situation. This makes it possible to define the detection zone with absolute precision. Reach: 2 to 8 m. Clean look without sensor elements to spoil the design because the sensor lenses are integrated into the luminaire diffuser where they are virtually hidden from view – a patented world first! 1430 lm at 14 W. In neutral white or warm white.

DL Vario Quattro PRO LED

Neutral white silver

EAN 4007841 035495

Article number 035495



Technical specifications

Dimensions (Ø x H)	310 x 69 mm
Mains power supply	220 – 240 V / 50 – 60 Hz
Mounting height max.	6,00 m
Sensor Technology	passive infrared
Output	14 W
Interconnection	Yes
Fluorescent lamps, electronic ballast	500 W
Fluorescent lamps, uncorrected	500 VA
Fluorescent lamps, series-corrected	500 VA
Fluorescent lamps, parallel-corrected	500 VA
Switching output 1, low-voltage halogen lamps	500 VA
LED lamps	16 W
LED lamps > 2 W	64 W
LED lamps > 8 W	64 W
Capacitive load in µF	88 µF
Type of interconnection	Master/master
Interconnection, number	10 lights max.
Slave mode/selectable	No
Luminous flux	1430 lm
Efficiency	102 lm/W
Colour temperature	4000 K
Colour variation LED	SDCM3
Colour Rendering Index	80-89
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
LED life expectancy (25 °C)	> 60000 h
Base	without
LED cooling system	Passive Thermo Control

With motion detector	Yes
Detection angle	360 °
Angle of aperture	180 °
Sneak-by guard	Yes
Capability of masking out individual segments	No
Electronic scalability	No
Mechanical scalability	Yes
Reach, detail	Reach adjustable from 2 – 8 m in 4 directions (90° in each)
Reach, radial	6 x 6 m (36 m²)
Reach, tangential	16 x 16 m (256 m²)
Photo-cell controller	Yes
Twilight setting	2 – 1000 lx
Time setting	5 s – 30 Min.
Basic light level function	Yes
Basic light level function time	10/30 min, all night
Soft light start	Yes
Continuous light	selectable, 4h
Impact resistance	IK07
IP-rating	IP54
Protection class	II
Ambient temperature	-20 – 35 °C
Housing material	Plastic
Cover material	Plastic, structured
Manufacturer's Warranty	5 years
Settings via	Potentiometers
With remote control	No
Version	Neutral white silver
PU1, EAN	4007841035495

DL Vario Quattro PRO LED


Neutral white silver

EAN 4007841 035495

Article number 035495



Detection Zone




Mögliche Montagehöhe: 2,00 m – 6,00 m

Orange: radial


Schwarz: tangential

4 skallerbare Zonen

Dimension Drawing

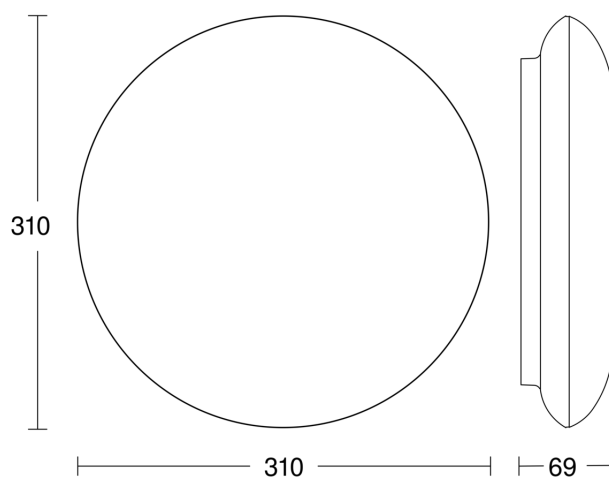


Light Distribution Curve



Output	14 W
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
Luminous flux	1430 lm
Colour temperature	4000 K
Colour Rendering Index	80-89
LED life expectancy (max. °C)	50000 h
LED cooling system	Passive Thermo Control

Master circuit diagram



Sensor-switched LED outdoor light - Professional Line

DL Vario Quattro PRO LED

Neutral white silver

EAN 4007841 035495

Article number 035495



Master/master interconnection circuit diagram

