



DATA SHEET

BURBANK

Burbank 6W LED Gimbal Downlighter 930

Mains Dimmable LED Recessed Downlighter
Head Tilt Action
Easy Installation

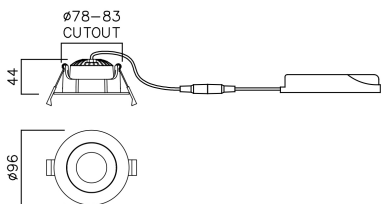

GENERAL INFORMATION		LUMINAIRE PERFORMANCE	
Product Code	NBU6/G/930	Energy Rating	N/A
Product Range	Burbank	Luminaire Lumens (lm)	599
Product Category	Downlights	Power Consumption (W)	6
Fixing Method	Recessed	Efficacy (l.m/c.W)	97
IP Rating	44 to front	Operating Temp. (Min/Max)	-20°C - 25 °C
IK Rating	N/A	LIGHT SOURCE	
Warranty	5 Years Unlimited Hours	Type	LED
DIMENSION/WEIGHT		Correlated Colour Temp.	3000
Dimensions (D x DIA) (mm)	D=44, DIA=96	Colour Rendering Index (CRI)	>90
Cut-out Size (mm)	78-83	Lumen Depreciation	L70 100000
Product Weight (Kg)	0.3	SDCM	<3
CONSTRUCTION		ELECTRICAL INPUT	
Body Material	Die Cast Aluminium	Voltage (V)	220-240V AC
Body Colour	White RAL9003	Operating Frequency	50
Optical Material	Acrylic	In Rush	N/A
Optical Finish	Clear	Drivers per MCB*	N/A
Termination	3x2x2.5mm sq. Push In Terminal	Class	Class 2
Driver - Integral or Remote	Remote	Power Factor	>0.95
PACKAGING		Cable Entry	On Driver
Carton Dimensions (mm)	N/A	ELECTRICAL OUTPUT	
Quantity per Outer Carton	N/A	Forward Current (mA)	140mA
Total Weight incl. Carton (Kg)	N/A	Forward Voltage (Vf)	30-40V DC
		EMERGENCY DATA	
		Mode of Operation	N/A
		Battery Duration	N/A
		Battery Type	N/A
		Battery Specification	N/A
		Ballast Lumen Factor (BLF)	N/A
		DIMMING	
		DALI	N/A
		OTHER	Mains Dimmable
		Switch Dim	N/A
		Corridor Function	N/A
		SENSORS	
		Microwave	N/A
		PIR	N/A
		STANDARDS/APPROVALS	
		CE Marked	Yes
		Certificate of Conformity	Yes
		Accreditations	N/A
		BARCODE	
		EAN Number	5055943084780

* GUIDE ONLY