

Industrial luminaire for LED light sources.

TECHNICAL DATA

Mounting: surface mounted, in the ceiling, with mounting frame (sold separately), suspended, on chains (on request), for hanging on a cable, with special mounting bracket (on request)

Body: high pressure die-cast aluminum

Colour: gray

Diffuser: tempered glass

ELECTRICAL DATA

Power supply efficiency: >95%

Power: 220-240V 50/60Hz

Includes light source: yes

Type of equipment: ED, DALI

Electrical connection: max 3x2,5 mm² wire, max 5x2,5 mm² wire

OPTICAL DATA

Light distribution: rotationally-symmetric

Way of lighting: direct

GENERAL DATA

Lifetime (L80B10): 100 000 h

Lifetime (L90B10): 50 000 h

Additional information: Ball impact resistance. The possibility of using one or more power supplies in the luminaire.

Other remarks: Beam angle: 100°


Warranty: 3 years

Application: warehouses, logistics centers, industrial facilities, sport facilities, roofing



Code	Replacement of conventional technology [W]	Type of equipment	Luminaire power [W]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/ Ra	Operating temperature range [°C]
Type: Standard luminaire								
300092.00067	150W MH (180W)	ED	112	14800	132	4000	≥80	-40 ... +40
300092.00052	250W MH (300W)	ED	158	20650	131	4000	≥80	-40 ... +40
300092.00051	250W MH (300W)	ED	192	25250	132	4000	≥80	-40 ... +45
300092.00091	150W MH (180W)	DALI	110	14800	135	4000	≥80	-40 ... +55
300092.00092	250W MH (300W)	DALI	158	20650	131	4000	≥80	-40 ... +45
300092.00093	250W MH (300W)	DALI	195	25250	129	4000	≥80	-40 ... +40
Type: Luminaires for outdoor installation without roof								
300092.00117	150W MH (180W)	ED	112	14800	132	4000	≥80	-40 ... +40
300092.00118	250W MH (300W)	ED	158	20650	131	4000	≥80	-40 ... +40
300092.00119	250W MH (300W)	ED	192	25250	132	4000	≥80	-40 ... +45
300092.00120	150W MH (180W)	DALI	110	14800	135	4000	≥80	-40 ... +55
300092.00121	250W MH (300W)	DALI	158	20650	131	4000	≥80	-40 ... +45
300092.00122	250W MH (300W)	DALI	195	25250	129	4000	≥80	-40 ... +40

Code	Dimensions [mm] L W H	Mounting dimensions [mm] L	Pallet quantity	Quantity in package	Net weight [kg]
Type: Standard luminaire					
300092.00067	515 345 90	430	40	1	6.5
300092.00052	515 345 90	430	40	1	6.5
300092.00051	515 345 90	430	40	1	6.5
300092.00091	515 345 90	430	40	1	6.5
300092.00092	515 345 90	430	40	1	6.5
300092.00093	515 345 90	430	40	1	6.5

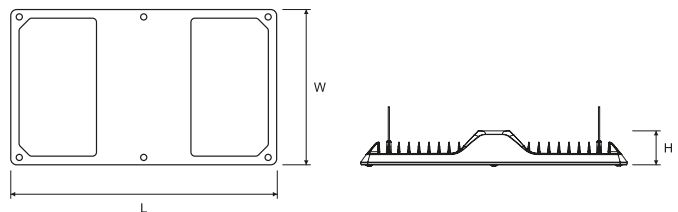

Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.


Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm series and the LM-79 norm.

Manufacturer does not provide suspension components.

Up-to-date product info available on our website www.lugbox24.com

Code	Dimensions [mm] L W H	Mounting dimensions [mm] L	Pallet quantity	Quantity in package	Net weight [kg]
Type: Luminaires for outdoor installation without roof					
300092.00117	515 345 90	430	40	1	6.5
300092.00118	515 345 90	430	40	1	6.5
300092.00119	515 345 90	430	40	1	6.5
300092.00120	515 345 90	430	40	1	6.5
300092.00121	515 345 90	430	40	1	6.5
300092.00122	515 345 90	430	40	1	6.5

OTHER PICTURES



Luminaire suspended on a cable with a special mounting bracket - top view

ACCESSORIES



150020.00821 Adjustable mounting bracket

150020.00957 Adjustable mounting bracket for mounting without roof



150010.00973

Suspended frame for connecting two CRUISER 2 LED or CRUISER 2 LB LED luminaires



150020.00824 Bracket for surface mounting

150020.00956 Bracket for surface mounting without roof



150020.00990


Mounting bracket for hanging CRUISER 2 LED/CRUISER 2 LB LED luminaires on a cable



150021.00917 Frame for recessed mounting

150021.00941 Frame for recessed mounting without roof

LIGHT BEAM CURVES

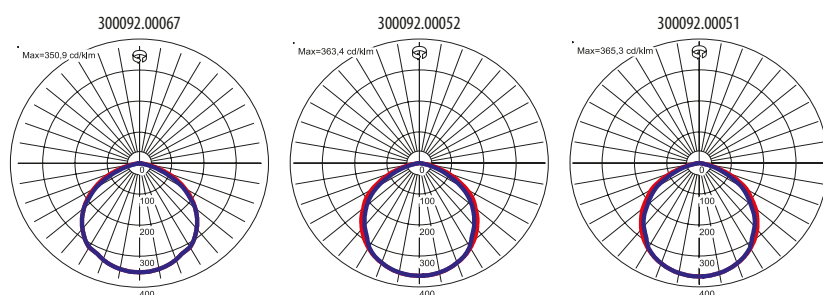

Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.


Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Manufacturer does not provide suspension components.


Up-to-date product info available on our website www.lugbox24.com

WAY OF LIGHTING


300092.00067



300092.00052



300092.00051



OTHER PROJECTS



Puccini, Szczecin, Poland

Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Manufacturer does not provide suspension components.

Up-to-date product info available on our website www.lugbox24.com