



090400.5L08.115.938

ATLANTYK 2.0 OPTI LED 1245 STANDARD + through wiring (TW) 5x1,5 mm² 34W 4700lm 4000K polycarbonate IP65 light gray

Hermetic LED luminaire, water-jet proof, intended for mounting inside industrial and architectural objects.

TECHNICAL DATA

Mounting: directly on the ceiling, with mounting brackets (included), suspended, on chains, on wire suspension (on request)

Body: plastic

Colour: light gray

RAL: 7035

Operating temperature range [°C]: -25 ... +35

ELECTRICAL DATA

Power supply efficiency: >90%

Power: 220-240V 50/60Hz

Includes light source: yes

Output current [mA]: 250

Type of equipment: STANDARD + through wiring (TW) 5x1,5 mm², EASY CONNECT

Light source / lamp: LED

Electrical connection: max 5x1,5 mm² wire

OPTICAL DATA

Light distribution: double asymmetric

Way of lighting: direct

Diffuser: polycarbonate

CRI/Ra: ≥80

Beam angle: 2xAS

Lumen luminaire [lm]: 4700

Colour
temperature [K]: 4000

UGR: <22

GENERAL DATA

Lifetime (L80B10): 100 000 h

Available on request: available with connection to a central battery power supply, radar motion detector, twilight sensor

Additional information: transparent diffuser

Warranty: 5 years

Application: parking areas, production halls, warehouses, assembly halls, warehouses, electricity plants, mills, workshops, wood and paper industry


Code	Beam angle	Luminaire power [W]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra	Operating temperature range [°C]	Emergency operating time	Luminaire power EM [W]	Light output in emergency mode [lm]
090400.5L08.115.938	2xAS	34	4700	138	4000	≥80	-25 ... +35	-	-	-

The luminaires are not intended for mounting in places exposed to atmospheric conditions, in car washes, in rooms where washing with pressure washers is used, in livestock rooms, in aggressive environments, etc.

Luminous flux tolerance +/- 10%.


Power tolerance +/- 5%.

 Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com

Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.

The parameters in the data sheet are given for Ta=25°C.

Code	Dimensions [mm] L W H	Mounting dimensions [mm] D	Pallet quantity	Net weight [kg]
090400.5L08.115.938	1245 100 90	766	105	1,8

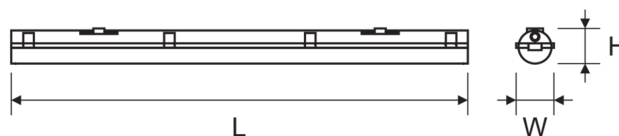

ACCESSORIES



150022.00986

ATLANTYK 2.0 LED through wiring end cap gray




150060.00987

Gripper (1 pcs.)

LIGHT BEAM CURVES

WAY OF LIGHTING

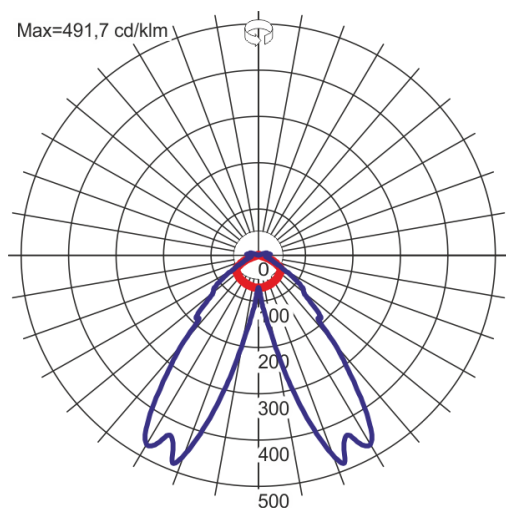

The luminaires are not intended for mounting in places exposed to atmospheric conditions, in car washes, in rooms where washing with pressure washers is used, in livestock rooms, in aggressive environments, etc.

Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com

Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.

The parameters in the data sheet are given for Ta=25°C.

Date of issue: 17-6-2019

The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires