


LED Floodlight

XLED PRO 240 SL

black

EAN 4007841 057718

STEINEL
PROFESSIONAL



LED

30 years (Ø 4,5h / day)



4000K neutral white



IP44



networkable via cable



energy saving



manufacturer's warranty
steinel-professional.de/garantie



CE



ENEC 05



KEMA KEUR

Function description

Day-bright illumination throughout: the XLED PRO 240 SL outdoor floodlight without motion detector. With fully swivelling LED flat panel and opal diffuser. 1830 lm, 4000 K, 20 W. Available in black, white and anthracite. Includes corner wall mount.

Technical specifications

| | |
|---|-------------------------|
| Dimensions (L x W x H) | 199 x 180 x 161 mm |
| Mains power supply | 230 – 240 V |
| Mounting height max. | 6,00 m |
| Output | 20 W |
| Luminous flux | 1830 lm |
| Colour temperature | 4000 K |
| Colour variation LED | SDCM3 |
| Colour Rendering Index CRI | 80-89 |
| With lamp | Yes, STEINEL LED system |
| Lamp | LED cannot be replaced |
| LED life expectancy (max. °C) | 60000 h |
| Drop in luminous flux in accordance with LM80 | L70B10 |

| | |
|----------------------------|---------------|
| With motion detector | No |
| Photo-cell controller | No |
| Impact resistance | IK00 |
| IP rating | IP44 |
| Protection class | II |
| Housing material | Plastic |
| Cover material | Plastic, opal |
| Manufacturer's Warranty | 5 years |
| Includes corner wall mount | Yes |
| PU1, net weight | 0,640 kg |
| Version | black |
| PU1, EAN | 4007841057718 |

LED Floodlight


XLED PRO 240 SL

black

EAN 4007841 057718

STEINEL[®]
PROFESSIONAL

Dimension Drawing

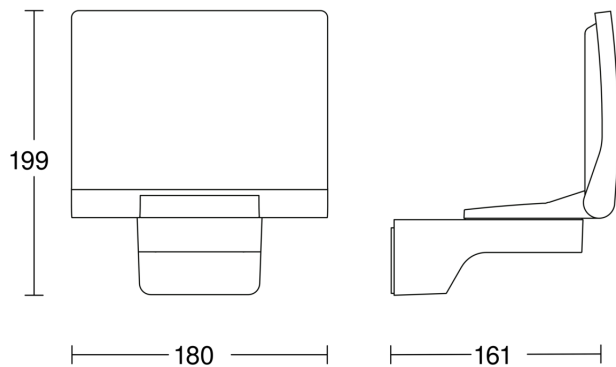

Master/slave interconnection circuit diagram

