


LED Floodlight

XLED home 2 SL

white

EAN 4007841 033125

STEINEL®
Intelligent technology



LED

14,8w



30 years (Ø 4,5h / day)

14,8 W 1184 lm

4000K neutral white



IP44



180° horizontal,
180° vertical



networkable via
cable



ideal 2 m



energy saving



5 JAHRE
HERSTELLER
GARANTIE
steinel.de/garantie



CE

Function description

Dazzlingly stylish LED floodlight. XLED home 2 SL – the outdoor floodlight without sensor. Freely swivelling LED panel with new opal cover for pleasant wide-area lighting (1184 lm at 14,8 W). Swivelling range: 180° (horizontally and vertically). Cooling system of high thermal conductivity magnesium composite (HCMC). Available in white, black, white, graphite and silver.

Technical specifications

Dimensions (L x W x H)	181 x 180 x 161 mm
Mains power supply	230 – 240 V / 50 – 60 Hz
Output	14,8 W
Luminous flux	1184 lm
Colour temperature	4000 K
Colour variation LED	SDCM3
Colour Rendering Index CRI	80-89
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
Drop in luminous flux in accordance with LM80	L70B10
LED cooling system	HCMC (High Conductive Magnesium Composite)

With motion detector	No
Photo-cell controller	No
Impact resistance	IK00
IP rating	IP44
Protection class	II
Housing material	HCMC
Cover material	Plastic, opal
Manufacturer's Warranty	5 years
PU1, net weight	0,483 kg
Version	white
PU1, EAN	4007841033125

<https://www.steinel.de>

LED Floodlight


XLED home 2 SL

white


EAN 4007841 033125



Dimension Drawing

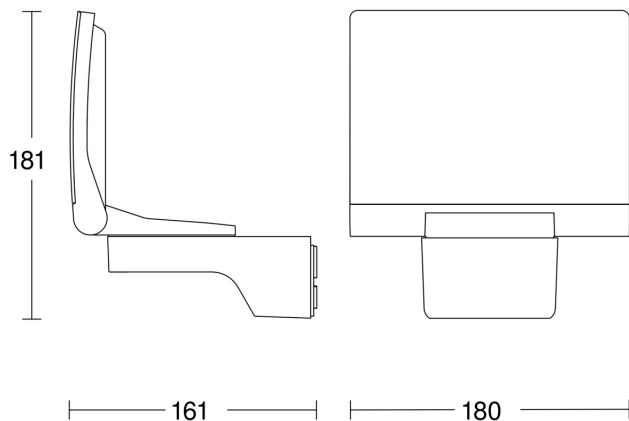

Light Distribution Curve



Output	14,8 W
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
Luminous flux	1184 lm
Colour temperature	4000 K
Colour Rendering Index CRI	80-89
LED life expectancy (max. °C)	50000 h
LED cooling system	HCMC (High Conductive Magnesium Composite)

Master/slave interconnection circuit diagram

