


LED Floodlight

# XLED PRO Square XL SL

white

EAN 4007841 009984

**STEINEL**  
PROFESSIONAL



**LED**

**48w**



4000K neutral  
white



infrared sensor  
240°



max. 12 m



IP54



360° horizontal,  
90° vertical



2 - 1000 lux



5 sec - 15 min



soft light start

## Function description

Extra brightness. XLED PRO Square XL SL – the tilting and turning slave version without sensor in black or white. Ingenious lens matrix for illuminating large areas with 4400 lm of day-bright light (48 W). Basic-light LEDs for better orientation. High-quality aluminium heat sink. Interconnection via cable.

## Technical specifications

Dimensions (L x W x H)	208 x 178 x 130 mm
Mains power supply	220 – 240 V / 50 – 60 Hz
Mounting height max.	6,00 m
Output	48 W
Luminous flux	4400 lm
Colour temperature	4000 K
Colour variation LED	SDCM3
Colour Rendering Index CRI	80-89
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
Drop in luminous flux in accordance with LM80	L70B10
LED cooling system	Passive Thermo Control
With motion detector	No

Photo-cell controller	No
Basic light level function time	10 min, 30 min, all night
Continuous light	selectable, 4h
Impact resistance	IK00
IP rating	IP54
Protection class	I
Ambient temperature	-20 – 40 °C
Housing material	Aluminium
Cover material	Plastic, transparent
Manufacturer's Warranty	5 years
PU1, net weight	1,811 kg
Version	white
PU1, EAN	4007841009984

## Accessories

EAN 4007841 007638      Remote control RC9

LED Floodlight


# XLED PRO Square XL SL

white

EAN 4007841 009984

**STEINEL**<sup>®</sup>  
PROFESSIONAL

## Dimension Drawing

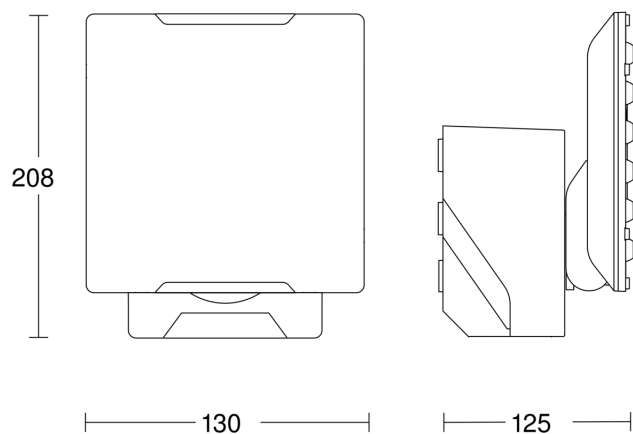

## Slave circuit diagram

