


Sensor-switched LED floodlight

XLED PRO Wide

eNet - white

EAN 4007841 010218

STEINEL[®]
PROFESSIONAL



LED

24,8w



4000K neutral white



infrared sensor 240°



max. 12 m



IP54



360° horizontal, 90° vertical



2 - 1000 lux



5 sec - 15 min



soft light start

Function description

Lighting precision on a broad front. XLED PRO Wide sensor-switched floodlight with even light pattern thanks to the precision lens matrix. Fully tilting and turning flat-design light head. With a mounting height of up to 6 m, ideal for illuminating large rectangular areas. Powerful high-end LEDs giving 2400 lm of light at 24.8 W. Sensor with 240° coverage and 12 m reach. Linear basic light level. High-quality aluminium heat sink. For integrating into the eNet system using eNet wireless standard.

Technical specifications

Dimensions (L x W x H)	126 x 265 x 188 mm
Mains power supply	220 – 240 V / 50 – 60 Hz
Mounting height max.	6,00 m
Sensor Technology	passive infrared
Output	24,8 W
Interconnection	Yes
Luminous flux	2400 lm
Colour temperature	4000 K
Colour variation LED	SDCM3
Colour Rendering Index CRI	80-89
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
LED cooling system	Passive Thermo Control
With motion detector	Yes
Detection angle	240 °
Angle of aperture	180 °

Sneak-by guard	Yes
Capability of masking out individual segments	Yes
Reach, radial	r = 3 m (19 m ²)
Reach, tangential	r = 12 m (302 m ²)
Photo-cell controller	Yes
Twilight setting	2 – 1000 lx
Impact resistance	IK03
IP rating	IP54
Protection class	I
Ambient temperature	-20 – 40 °C
Housing material	Aluminium
Cover material	Plastic, transparent
Manufacturer's Warranty	5 years
PU1, net weight	1,870 kg
Version	eNet - white
PU1, EAN	4007841010218

Sensor-switched LED floodlight

XLED PRO Wide

eNet - white


EAN 4007841 010218

STEINEL[®]
PROFESSIONAL

Accessories

EAN 4007841 032838	eNet switching actuator
EAN 4007841 032821	eNet wireless hand-held transmitter 2x

Detection Zone

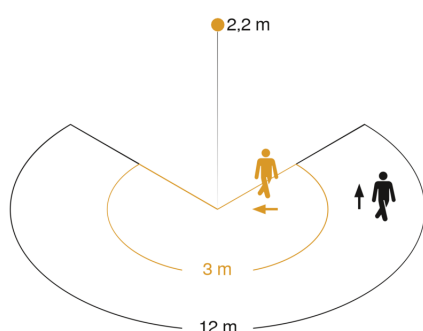


Mögliche Montagehöhe: 2,00 m – 6,00 m


Orange: radial

Schwarz: tangential

Dimension Drawing

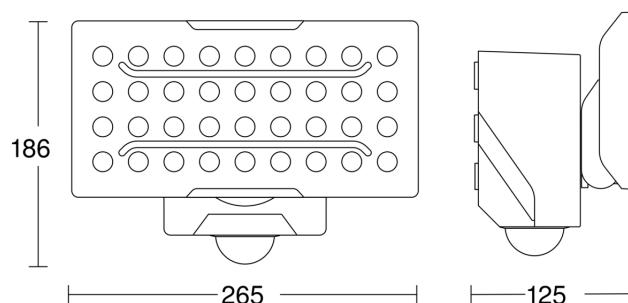

Light Distribution Curve



Output	24,8 W
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
Luminous flux	2400 lm
Colour temperature	4000 K
Colour Rendering Index CRI	80-89
LED life expectancy (max. °C)	50000 h
LED cooling system	Passive Thermo Control