

120202.5L091.41 POWERLUG LED 22100lm 4000K IP65 asymmetric-wide gray

Modern floodlight for LED light source.

TECHNICAL DATA	Mounting: on the adjustable holder, on the substrate Body: high pressure die-cast aluminum Lateral Surface Wind Exposed: 0.163 m ² Colour: gray RAL: 7035 Luminaire with limited surface temperature: yes Operating temperature range [°C]: -40 ... +35
ELECTRICAL DATA	Power supply efficiency: >92% Power: 220-240V 50/60Hz Includes light source: yes Output current [mA]: 700 Type of equipment: STANDARD Light source / lamp: LED Electrical connection: max 3x2,5 mm ² wire
OPTICAL DATA	Light distribution: asymmetric-wide Way of lighting: direct Type of optic: lens Diffuser: tempered glass CRI/Ra: >70 Beam angle: asymmetric-wide Lumen luminaire [lm]: 22100 Colour temperature [K]: 4000
GENERAL DATA	Lifetime (L80B10): 100 000 h Available on request: LLOC, DALI, DIM 1..10V Warranty: 5 years Application: industrial facilities, warehouses, metro, parking areas, facades



Code	Beam angle	Luminaire power [W]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra	Operating temperature range [°C]	Type of equipment
120202.5L091.41	asymmetric-wide	155	22100	143	4000	>70	-40 ... +35	STANDARD

Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.


Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com

Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.



The parameters in the data sheet are given for Ta=25°C.

Code	Dimensions [mm] L W H	Pallet quantity	Quantity in package	Net weight [kg]
120202.5L091.41	403 405 95	24	3	8,8

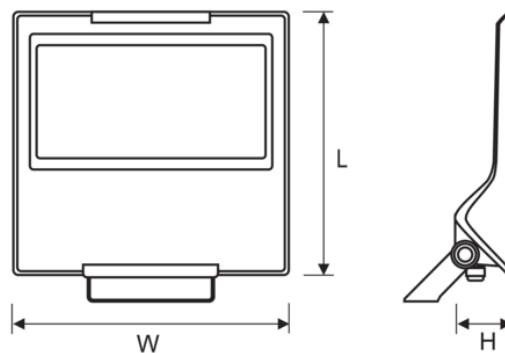

LIGHT BEAM CURVES

WAY OF LIGHTING

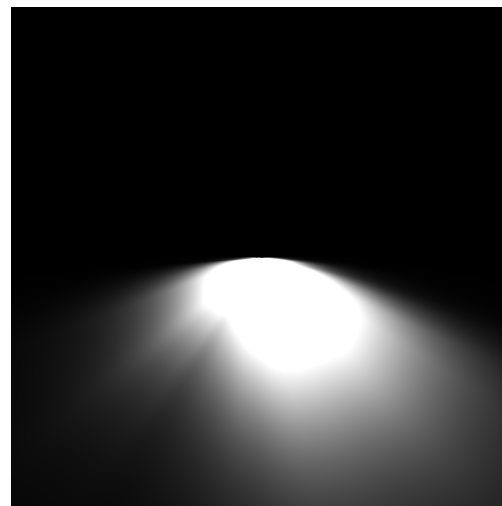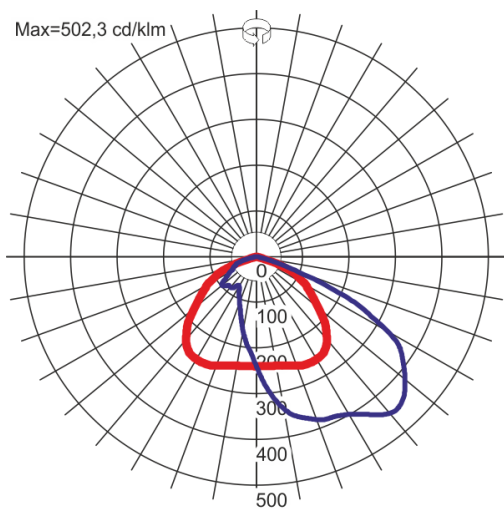

Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com

Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.

The parameters in the data sheet are given for $T_a=25^{\circ}\text{C}$.

Date of issue: 9-9-2019

The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires