



## WA-LS-PE 06-165/T

- Softline-design
- shock-resistant housing
- low-distortion sound

The 6W powered speaker is equipped with a 165mm full-range loudspeaker chassis and a 100V transformer with 3 power adjustments. The high-density, shock-resistant MDF wood housing in white provides a low resonance sound. A sturdy front grille made of steel guarantees enduring stability.

The speaker is also with the high protection class IP 54 against the security risks of environmental influences. The reliable spring clamp on the rear plate ensures a quick mounting on walls.

The speaker is connected by a 2-pin push-clamp.



## Technical Data

|                    |                    |
|--------------------|--------------------|
| Description        | WA-LS-PE 06-165/T  |
| Power              | 6/3/1,5 W          |
| Frequency Range    | 197 - 21.900 Hz    |
| Frequency Response | 175 - 23.500 Hz    |
| SPL 1W/1m, peak    | 100,6 dB           |
| SPL Pmax/1m, peak  | 108,4 dB           |
| Sensitivity 1W/1m  | 98,6 dB            |
| Dispersion (-10dB) | 180° (h) / 96° (v) |
| Temperature range  | -20 / +80 °C       |
| Dimensions         | 267x192x82 mm      |
| Weight (net)       | 1,91 kg            |
| Colour             | white              |
| Connector          | 2-pin push clamp   |
| Mounting           | spring clamp       |
| Packing Unit       | 6                  |


## Product Attributes




## Polar Diagrams

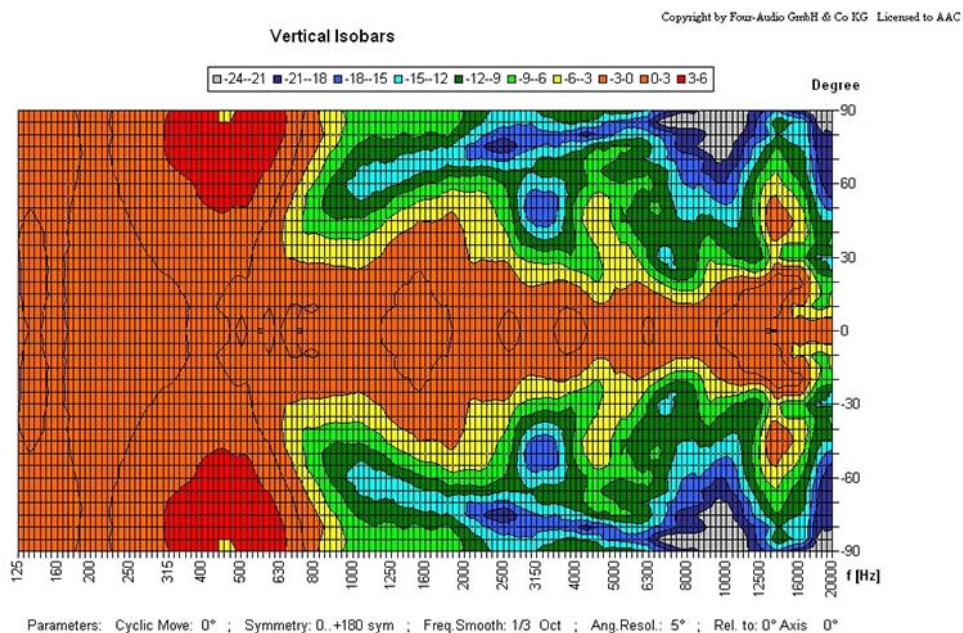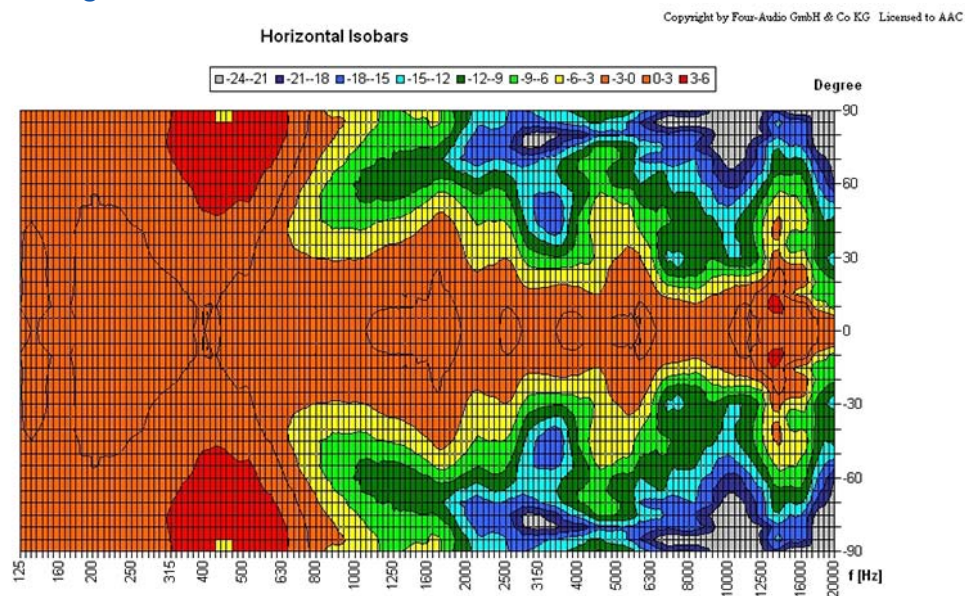


## Frequency Response Diagrams

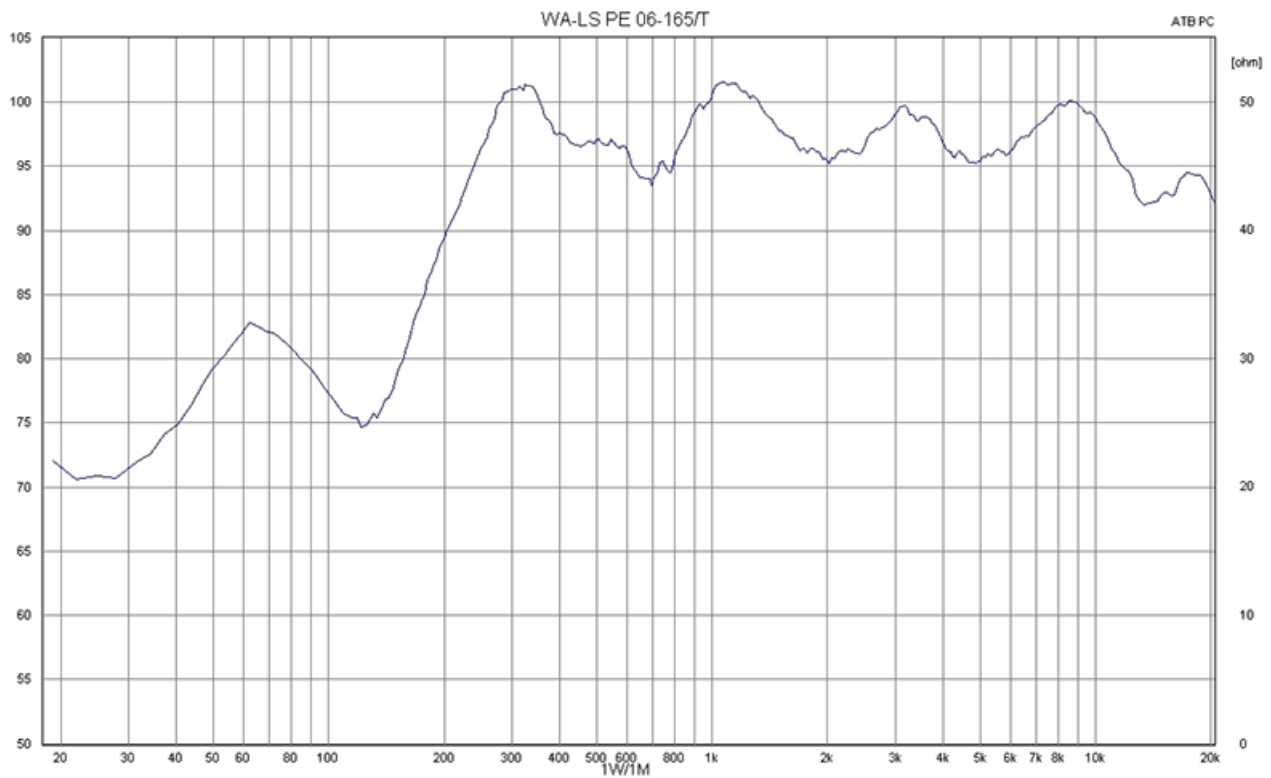

## Technical Diagrams

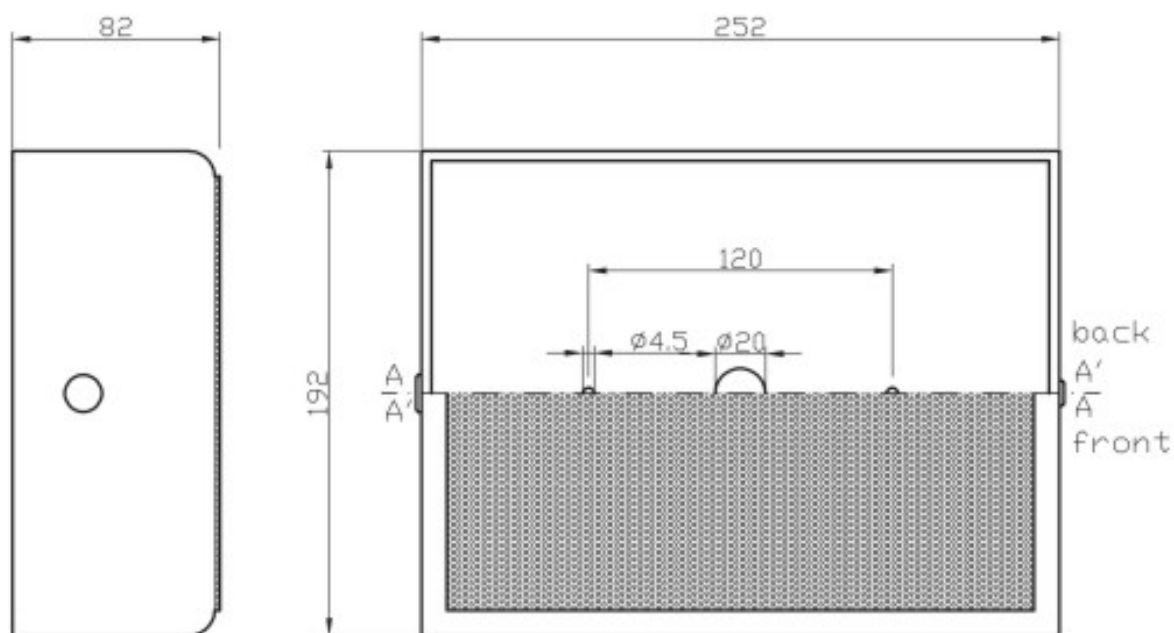

Measurements according to DIN IEC 268-5 | RoHS compliant (2002/95/EG)



**Article Nr.:**  
50617050

**Packing Unit:**  
6

