

Tuotetiedot

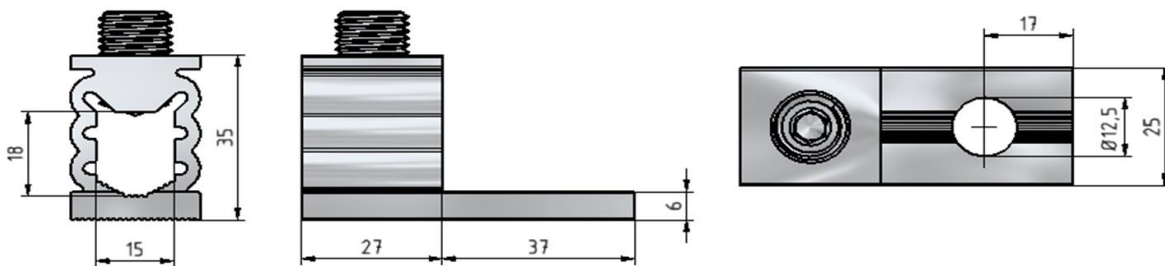
Tuotekoodi	VC02-0003	Sähkönumero	1912301	EAN-koodi	6410019123012
Tuotenimi	OT -Yleiskaapelikenkä 16-120mm ²	ETIM-luokka	EC000897		
Johtimet	1xAl/Cu 16-120 mm ²				

Tekniset tiedot

Nimellisvirta (IEC)	Cu	280	A
	Al	230	A
Nimellisjännite (IEC)		690	V
		-	
		-	
Napaluku		1	kpl
Max. Johdinkoko		120	mm ²
Kivistysmomentti			
	16-35 mm ²	12	Nm
	50-120 mm ²	25	Nm
		-	
		-	
Käyttölämpötila		80	°C
Paino		50	g
		-	
Standardit	EN 61238-1:2003		
Väri / Materiaali	Tinapinnoitettu alumiini		
Kiinnitys / Kytkeä	Ruuvi M14		


Kuvaus

Ounevan OT-yleisliittimet ovat tarkoitettu Al- ja Cu-johdinten laitteistokytkeäntöihin. Liittimiä käytetään sähkökojeissa ja kojeistoissa. OT-liittimet valmistetaan tinapinnoitetusta alumiinista.

Mittakuva

Pakkaus

Pakkausmuoto	Laatikko	Kpl / Pakkaus	30	Paino [kg]	1,61
Pituus [mm]	210	Leveys [mm]	160	Korkeus [mm]	105

Ouneva Oy

Teollisuustie 21
FI-82730 Tuupovaara
Finland

www.ounevagroup.fi

www.ounevaproducts.fi

Product data

Product code	VC02-0003	STK-code	1912301	EAN-code	6410019123012
Product name	OT Universal connector 16-120mm ²			ETIM class	EC000897
Wires	1xAU/Cu 16-120 mm ²				

Technical data

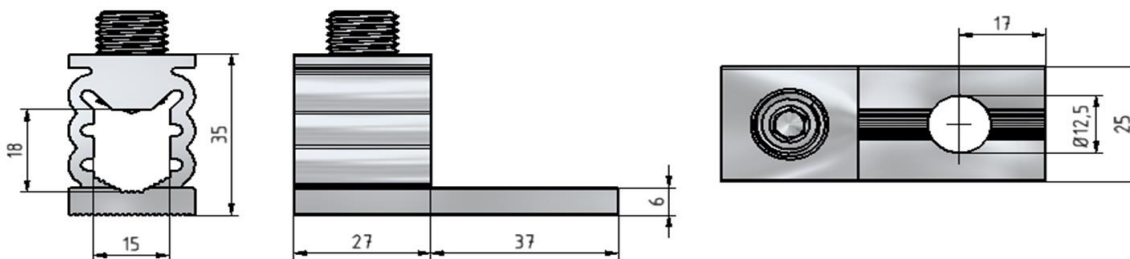
Nominal current (IEC)	Cu	280	A
	Al	230	A
Nominal voltage (IEC)		690	V
		-	
		-	
		-	
Number of poles		1	pcs
Max. Cross section		120	mm ²
Tightening torque	16-35 mm ²	12	Nm
	50-120 mm ²	25	Nm
		-	
		-	
		-	
Operating temperature		80	°C
Weight		50	g
		-	



Standards	EN 61238-1:2003
Color / Material	Tin plated aluminium
Mounting / Connection	Screw M14

Description

Ouneva OT-connectors are a universal terminal series for connecting Al- and Cu-conductors to equipment. OT-connectors are used in equipment or as a transfer terminal between copper and aluminium. Connectors are made of tin plated aluminium.

Drawing

Package

Package	Box	Pcs / Package	30	Weight [kg]	1,61
Length [mm]	210	Width [mm]	160	Height [mm]	105

Ouneva Oy

Teollisuustie 21
FI-82730 Tuupovaara
Finland

www.ounevagroup.fi

www.ounevaproducts.fi