

Tuotetiedot

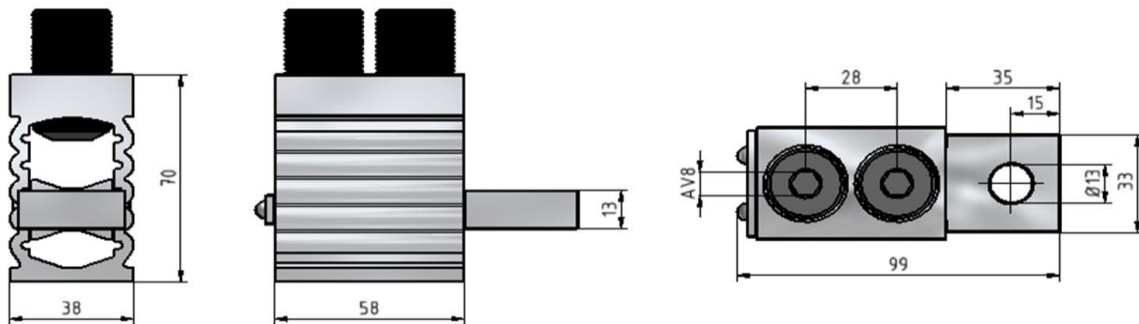
Tuotekoodi	VC02-0004	Sähkönumero	1912302	EAN-koodi	6410019123029
Tuotenimi	OT -Yleiskaapelikenkä 2x70-240mm ²	ETIM-luokka	EC000897		
Johtimet	2xAl/Cu 70-240 mm ²				

Tekniset tiedot

Nimellisvirta (IEC)	Cu	630	A
	Al	580	A
Nimellisjännite (IEC)		690	V
		-	
		-	
Napaluku		1	kpl
Max. Johdinkoko		240	mm ²
Kiritysmomentti			
	70-120 mm ²	35	Nm
	150-240 mm ²	45	Nm
		-	
		-	
		-	
Käyttölämpötila		80	°C
Paino		456	g
		-	
Standardit	EN 61238-1:2003		
Väri / Materiaali	Tinapinnoitettu alumiini		
Kiinnitys / Kytkenä	Ruuvi 2xM24		


Kuvaus

Ounevan OT-yleisliittimet ovat tarkoitettu Al- ja Cu-johdinten laitteistokytkenäisiin. Liittimiä käytetään sähkökojeissa ja kojeistoissa. OT-liittimet valmistetaan tinapinnoitetusta alumiinista.

Mittakuva

Pakkaus

Pakkausmuoto	Laatikko	Kpl / Pakkaus	10	Paino [kg]	4,81
Pituus [mm]	300	Leveys [mm]	210	Korkeus [mm]	105

Ouneva Oy

Teollisuustie 21
FI-82730 Tuupovaara
Finland

www.ounevagroup.fi

www.ounevaproducts.fi

Product data

Product code	VC02-0004	STK-code	1912302	EAN-code	6410019123029
Product name	OT Universal connector 2x70-240mm ²			ETIM class	EC000897
Wires	2xAl/Cu 70-240 mm ²				

Technical data

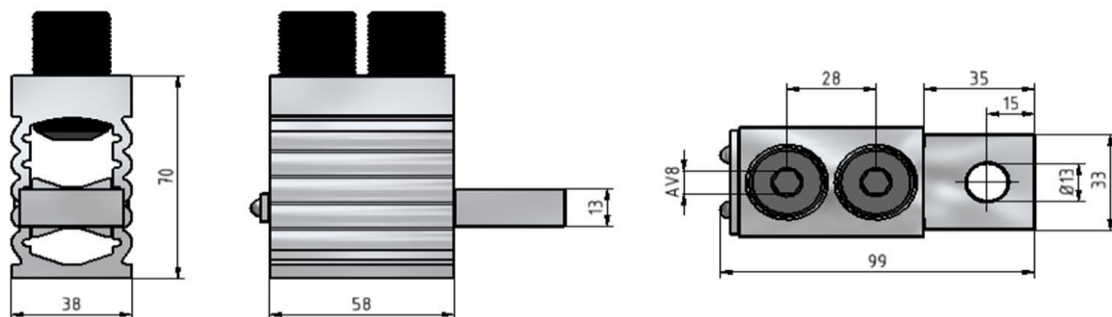
Nominal current (IEC)	Cu	630	A
	Al	580	A
Nominal voltage (IEC)		690	V
		-	
		-	
		-	
Number of poles		1	pcs
Max. Cross section		240	mm ²
Tightening torque			
	70-120 mm ²	35	Nm
	150-240 mm ²	45	Nm
		-	
		-	
Operating temperature		80	°C
Weight		456	g
		-	



Standards	EN 61238-1:2003
Color / Material	Tin plated aluminium
Mounting / Connection	Screw 2xM24

Description

Ouneva OT-connectors are a universal terminal series for connecting Al- and Cu-conductors to equipment. OT-connectors are used in equipment or as a transfer terminal between copper and aluminium. Connectors are made of tin plated aluminium.

Drawing

Package

Package	Box	Pcs / Package	10	Weight [kg]	4,81
Length [mm]	300	Width [mm]	210	Height [mm]	105

Ouneva Oy

Teollisuustie 21
FI-82730 Tuupovaara
Finland

www.ounevagroup.fi

www.ounevaproducts.fi