

Tuotetiedot

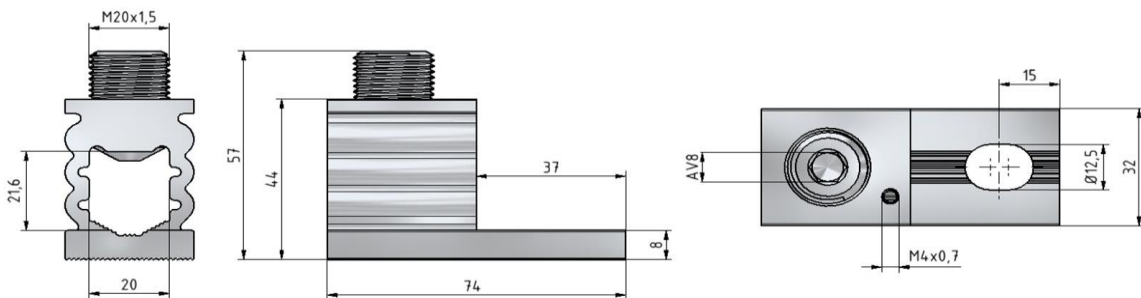
Tuotekoodi	VC02-0007	Sähkönumero	1912305	EAN-koodi	6410019123050
Tuotenimi	OT -Yleiskaapelikenkä 35-240mm ²	ETIM-luokka	EC000897		
Johtimet	1xAl/Cu 35-240 mm ²				

Tekniset tiedot

Nimellisvirta (IEC)	Cu	425	A
	Al	380	A
Nimellisjännite (IEC)		690	V
		-	
		-	
Napaluku		1	kpl
Max. Johdinkoko		240	mm ²
Kivistysmomentti			
	35-120 mm ²	26	Nm
	150-240 mm ²	40	Nm
		-	
		-	
		-	
Käyttölämpötila		80	°C
Paino		86	g
		-	
Standardit	EN 61238-1:2003		
Väri / Materiaali	Tinapinnoitettu alumiini		
Kiinnitys / KytKentä	Ruuvi M20		


Kuvaus

Ounevan OT-yleisliittimet ovat tarkoitettu Al- ja Cu-johdinten laitteistokytKentöihin. Liittimiä käytetään sähkökojeissa ja kojeistoissa. OT-liittimet valmistetaan tinapinnoitetusta alumiinista.

Mittakuva

Pakkaus

Pakkausmuoto	Laatikko	Kpl / Pakkaus	10	Paino [kg]	0,92
Pituus [mm]	125	Leveys [mm]	130	Korkeus [mm]	100

Ouneva Oy

Teollisuustie 21
FI-82730 Tuupovaara
Finland

www.ounevagroup.fi

www.ounevaproducs.fi

Product data

Product code	VC02-0007	STK-code	1912305	EAN-code	6410019123050
Product name	OT Universal connector 35-240mm ²			ETIM class	EC000897
Wires	1xAl/Cu 35-240 mm ²				

Technical data

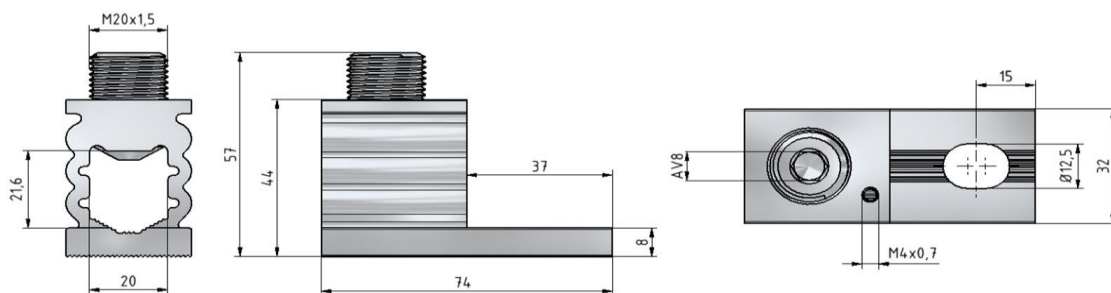
Nominal current (IEC)	Cu	425	A
	Al	380	A
Nominal voltage (IEC)		690	V
		-	
		-	
		-	
Number of poles		1	pcs
Max. Cross section		240	mm ²
Tightening torque			
	35-120 mm ²	26	Nm
	150-240 mm ²	40	Nm
		-	
		-	
		-	
Operating temperature		80	°C
Weight		86	g
		-	



Standards	EN 61238-1:2003
Color / Material	Tin plated aluminium
Mounting / Connection	Screw M18

Description

Ouneva OT-connectors are a universal terminal series for connecting Al- and Cu-conductors to equipment. OT-connectors are used in equipment or as a transfer terminal between copper and aluminium. Connectors are made of tin plated aluminium.

Drawing

Package

Package	Box	Pcs / Package	10	Weight [kg]	0,92
Length [mm]	125	Width [mm]	130	Height [mm]	100

Ouneva Oy

Teollisuustie 21
 FI-82730 Tuupovaara
 Finland

www.ounevagroup.fi

www.ounevaproducts.fi