

Tuotetiedot

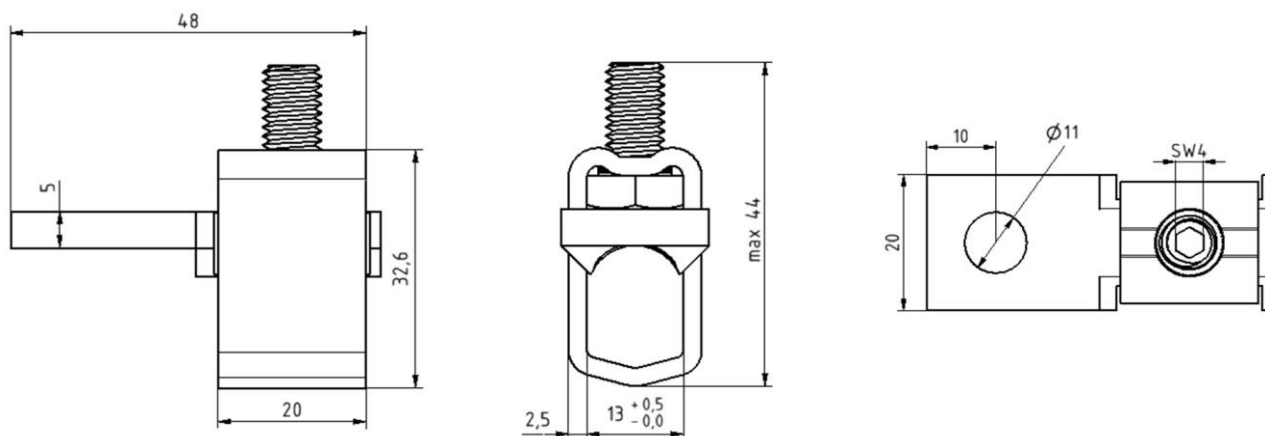
Tuotekoodi	VC01-0024	Sähkönumero	1912386	EAN-koodi	6410019123869
Tuotenimi	OL 25-95 D=11	ETIM-luokka	EC000897		
Johtimet	1xAl/Cu 25-95 mm ²				

Tekniset tiedot

Nimellisvirta (IEC)	Cu	320	A
	Al	320	A
		-	
		-	
		-	
		-	
Napaluku		1	kpl
Max. Johdin koko		95	mm ²
Kiristysmomentti	25-95 mm ²	20	Nm
		-	
		-	
		-	
Käyttölämpötila		80	°C
		-	
		-	
Standardit	SFS 2663:1975/ UL 486E		
Väri / Materiaali	Ruostumaton teräs/ Tinapinnoitettu kupari		
Kiinnitys / KytKentä	Kuusiokoloruuvi M8		


Kuvaus

OL-yleisliittimet ovat tarkoitettu alumiini- ja kuparikaapeleiden liittämiseen. Liittimen kehys on ruostumatonta terästä ja liitinkisko/painin on tinapinnoitettua kuparia.

Mittakuva

Pakkaus

Pakkausmuoto	Laatikko	Kpl / Pakkaus	15	Paino [kg]	1,16
Pituus [mm]	85	Leveys [mm]	144	Korkeus [mm]	85

Ouneva Oy

Teollisuustie 21
 FI-82730 Tuupovaara
 Finland

Tel. +358 400 179 750
info@ouneva.fi

www.ounevagroup.fi
www.ounevaproducts.fi

Product data

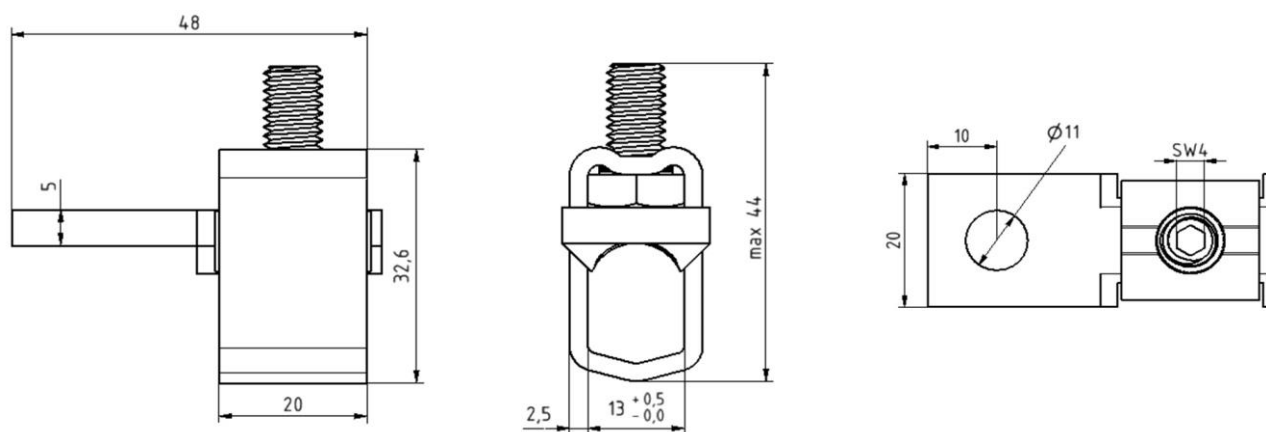
Product code	VC01-0024	STK-code	1912386	EAN-code	6410019123869
Product name	OL 25-95 D=11			ETIM class	EC000897
Wires	1xAl/Cu 25-95 mm ²				

Technical data

Nominal current (IEC)	Cu	320	A
	Al	320	A
		-	
		-	
		-	
		-	
Number of poles		1	pcs
Max. Cross section		95	mm ²
Tightening torque	25-95 mm ²	20	Nm
		-	
		-	
		-	
Max. Operating temperature		80	°C
		-	
		-	
Standards	SFS 2663:1975/ UL 486E		
Color / Material	Stainless steel/ Tin plated copper		
Mounting / Connection	Screw M8		


Description

OL-connectors are designed to be used connecting aluminium and copper conductors. Frames are made of stainless steel and busbars of tin plated copper.

Drawing

Package

Package	Box	Pcs / Package	15	Weight [kg]	1,16
Length [mm]	85	Width [mm]	144	Height [mm]	85

Ouneva Oy

Teollisuustie 21
 FI-82730 Tuupovaara
 Finland

Tel. +358 400 179 750
info@ouneva.fi

www.ounevagroup.fi
www.ounevaproducts.fi