


Lampholders and starter holders

26.620.2012

G5 Push through lampholders

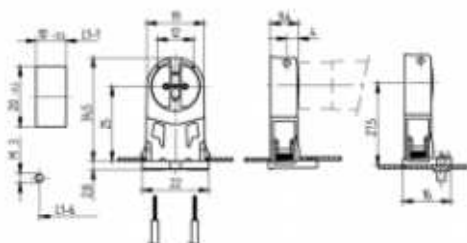

colour	pkg.	wt.	part no.
white	1000	3 g	26.620.2012.50

Approval: additional cULus (120W / 600V)

Lamp centre: 25 / 27.5 mm

Snap in / screw fixing foot

Housing: PC

Rotor: PBT

L1-1/L1-6: Recommended dimension - The distance between the cut-outs and the tolerance should be governed by the dimensions of the respective lamps and luminaires.

- For enclosed cut-outs: 10 x 20 mm
- A pair of lampholders provides a lamp length tolerance compensation of 2 mm

T 130	Tm 110						
					18 AWG 0.5 -1.0 mm ²	0.5 - 1.5	