


Basic ballasts for high pressure sodium and metal halide lamps

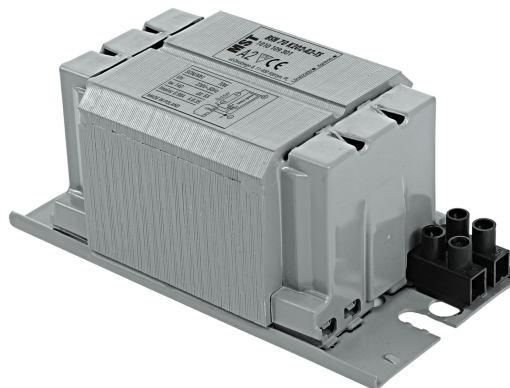

Product description

- Impregnated electromagnetic ballasts
- Screw terminal blocks
- For use in combination with series ignitors
- Winding temperature $T_w = 140^\circ\text{C}$

230V 50Hz, copper windings, with thermal protection, EEI A2 class

Product name	Ordering code	Power [W]	Lamps	Lamp current [A]	ΔT [$^\circ\text{C}$]	Thermal protection	T_w [$^\circ\text{C}$]	Weight [kg]	Capacitor [μF]	EEI	Dimensions [mm]				
											A1	A2	B1	C1	D1
BSN 70 K202-A2-TS 230V 50Hz BC1-118	1010 109 30146	70	SON/MH	0,98	55	yes	140	1,26	12	A2	118	94	61	52	6,2
BSN 100 K202-A2-TS 230V 50Hz BC1-123	1010 109 30246	100	SON/MH	1,20	60	yes	140	1,40	14	A2	123	98	61	52	6,2
BSN 150 K202-A2-TS 230V 50Hz BC2-134	1010 109 30346	150	SON/MH	1,80	60	yes	140	2,24	18	A2	134	113	76	65	6,2
BSN 250 K202-A2-TS 230V 50Hz BC2-160	1010 109 30446	250	SON/MH	3,00	70	yes	140	3,25	32	A2	160	139	76	65	6,2
BSN 400 K202-A2-TS 230V 50Hz BC3-166	1010 109 30546	400	SON/MH	4,45/4,60	80	yes	140	4,95	45	A2	166	145	97	83	6,2

