


Sensor-switched outdoor light

DL Vario Quattro LED

Silver

EAN 4007841 035440

STEINEL[®]
Intelligent technology



LED

10w



3000K warm-white



Infrared sensor
ideal 12 x 12 m



Scalable in every
direction
min. 2m
max. 6m



IP54



2 - 1000 lux



5 sec - 30 min



soft light start



manual override

Function description

Detects precisely where you want it to. Sensor-switched ceiling light providing reliable 360° all-round detection. Precise definition of the sensor detection zone in four directions thanks to four individually adjustable infrared sensors with a reach from 2 to 8 m. No visible sensor to spoil the design because the light diffuser is also the sensor lens – a patented world first 1000 lm at 10 W. With night-light function (10%). Max. mounting height: 6 m.

Sensor-switched outdoor light

DL Vario Quattro LED

Silver

EAN 4007841 035440


STEINEL[®]
Intelligent technology

Technical specifications

Dimensions (Ø x H)	310 x 69 mm
Mains power supply	220 – 240 V / 50 – 60 Hz
Mounting height max.	6,00 m
Sensor Technology	passive infrared
Output	10 W
Interconnection	No
Luminous flux	1000 lm
Efficiency	100 lm/W
Colour temperature	3000 K
Colour Rendering Index CRI	80-89
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
Base	without
LED cooling system	Passive Thermo Control
With motion detector	Yes
Detection angle	360 °
Angle of aperture	180 °
Sneak-by guard	Yes
Capability of masking out individual segments	No
Electronic scalability	No

Mechanical scalability	Yes
Reach, detail	Reach adjustable from 2 - 8 m in 4 directions (90° in each)
Reach, radial	4 x 4 m (16 m ²)
Reach, tangential	16 x 16 m (256 m ²)
Photo-cell controller	Yes
Twilight setting	2 – 1000 lx
Time setting	5 s – 30 Min.
Basic light level function	Yes
Basic light level function time	10/30 min, all night
Soft light start	Yes
Continuous light	selectable, 4h
Impact resistance	IK07
IP rating	IP54
Protection class	II
Ambient temperature	-20 – 35 °C
Housing material	Plastic
Cover material	Plastic, structured
Manufacturer's Warranty	3 years
With remote control	No
Version	Silver
PU1, EAN	4007841035440

Detection Zone

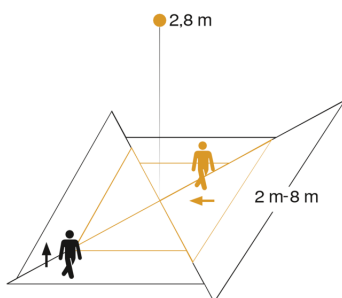


Mögliche Montagehöhe: 2,00 m – 6,00 m

Orange: radial

Schwarz: tangential

4 skalierbare Zonen

Dimension Drawing

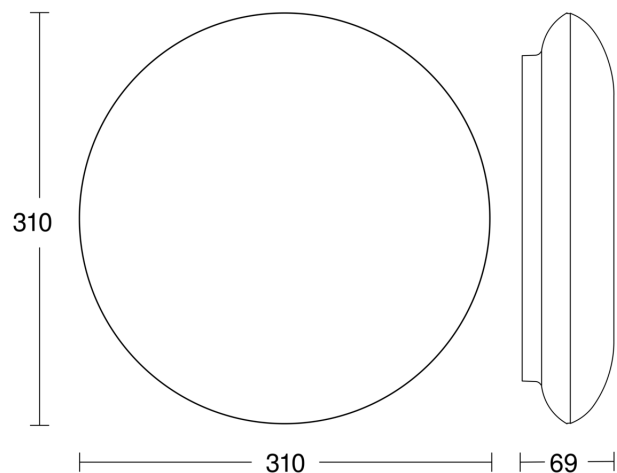

<https://www.steinell.de>