


Indoor light

# RS PRO LED P2 SL

Neutral white

EAN 4007841 056087

**STEINEL**<sup>®</sup>  
PROFESSIONAL



IP54



energy saving



5 JAHRE  
HERSTELLER  
GARANTIE  
steinel-professional.de/garantie



CE



ENEC 10



VDE



IP54



energy saving



IP54



CE

## Function description

Circular classic. Perfect shape. Perfect efficiency. The perfect indoor light as slave version without sensor. The RS PRO LED P2 SL integrates harmoniously into corridors, hallways and stairwells. It combines timeless design and extremely easy installation with pioneering technology and can be interconnected with the master version by cable. Output: 15,5 W with 1810 lm, 4000 K.

## Technical specifications

Dimensions (Ø x H)	320 x 110 mm
Mains power supply	220 – 240 V / 50 – 60 Hz
Output	15,5 W
Luminous flux	1810 lm
Colour temperature	4000 K
Colour Rendering Index CRI	80-89
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
Drop in luminous flux in accordance with LM80	L80B10
Base	without
LED cooling system	Passive Thermo Control

With motion detector	No
Photo-cell controller	No
Soft light start	Yes
Impact resistance	IK03
IP rating	IP54
Protection class	II
Ambient temperature	-10 – 40 °C
Housing material	Plastic
Cover material	Plastic, opal
Manufacturer's Warranty	5 years
Version	Neutral white
PU1, EAN	4007841056087

Indoor light


# RS PRO LED P2 SL

Neutral white


EAN 4007841 056087

**STEINEL**<sup>®</sup>  
PROFESSIONAL

## Dimension Drawing

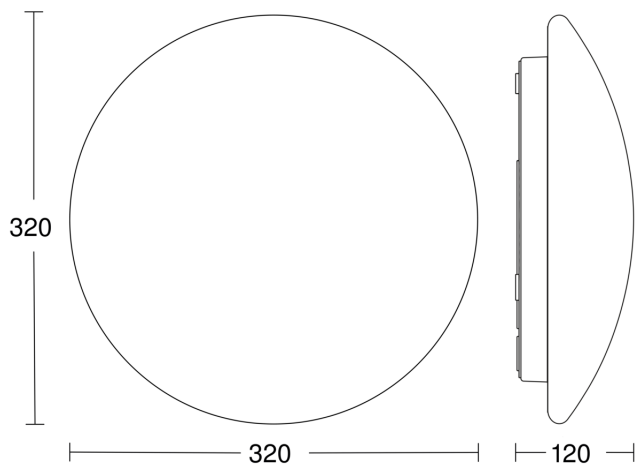

## Slave/wireless master interconnection circuit diagram



## Master/slave interconnection circuit diagram

