

220-240V  
50/60 HzIP  
20

Decorative downlight luminaire, adapted for tool-free assembly, for suspended ceilings, for LED light sources. The luminaire in round version with different angles of light distribution.

**TECHNICAL DATA****Mounting:** in the ceiling, with mounting brackets (included)**Body:** aluminum**Colour:** white**ELECTRICAL DATA****Power:** 220-240V 50/60Hz**Includes light source:** yes**Type of equipment:** ED**OPTICAL DATA****Light distribution:** rotationally-symmetric**Way of lighting:** direct**Reflector:** polished faceted**GENERAL DATA****Lifetime (L80B10):** 60 000 h**Warranty:** 5 years**Application:** public utility facilities, delicatessen, supermarkets, shopping centers, offices, car showrooms, pathways, halls, classrooms, corridors


Code	Luminaire power [W]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra
030601.5L01.3X1	6	700	117	3000	≥80
030601.5L02.3X1	6	700	117	4000	≥80
030551.5L01.3X1	14	1200	86	3000	≥80
030551.5L02.3X1	14	1250	89	4000	≥80
030551.5L03.3X1	21	1800	86	3000	≥80
030551.5L04.3X1	21	1900	90	4000	≥80
030561.5L01.3X1	27	2550	94	3000	≥80
030561.5L02.3X1	27	2700	100	4000	≥80
030561.5L03.3X1	35	3300	94	3000	≥80
030561.5L04.3X1	35	3450	99	4000	≥80

030551.5L01.3  1

Beam angle

- 1 narrow
- 2 medium
- 3 wide

Code	Dimensions [mm] W H	Mounting dimensions [mm] ØS	Pallet quantity	Quantity in package	Net weight [kg]
030601.5L01.3X1	55 47	48	360	1	0.2
030601.5L02.3X1	55 47	48	360	1	0.2
030551.5L01.3X1	100 68	90	360	1	0.5
030551.5L02.3X1	100 68	90	360	1	0.5
030551.5L03.3X1	100 68	90	360	1	0.5
030551.5L04.3X1	100 68	90	360	1	0.5
030561.5L01.3X1	160 88	147	360	1	0.9
030561.5L02.3X1	160 88	147	360	1	0.9
030561.5L03.3X1	160 88	147	360	1	0.9

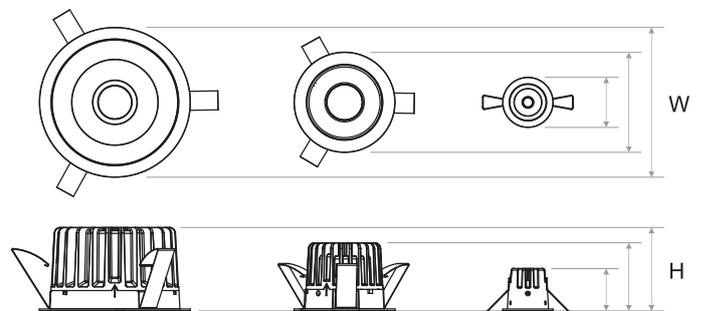

Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Up-to-date product info and General Warranty Terms available on our website [www.luglightfactory.com](http://www.luglightfactory.com)

Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.

The parameters in the data sheet are given for Ta=25°C.

Code	Dimensions [mm] W H	Mounting dimensions [mm] ØS	Pallet quantity	Quantity in package	Net weight [kg]
030561.5L04.3X1	160 88	147	360	1	0.9

**OTHER PICTURES**

ø55 mm



ø100 mm



ø160 mm

Luminous flux tolerance +/- 10%.  
Power tolerance +/- 5%.  
Up-to-date product info and General Warranty Terms available on our website [www.luglightfactory.com](http://www.luglightfactory.com)  
Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.  
The parameters in the data sheet are given for Ta=25°C.