


220-240V
50/60 HzIP
20



Decorative downlight luminaire, adapted for tool-free assembly, for suspended ceilings, for LED light sources. The luminaire in round version with different angles of light distribution.

TECHNICAL DATA**Mounting:** in the ceiling, with mounting brackets (included)**Body:** aluminum**Colour:** white, black**ELECTRICAL DATA****Power:** 220-240V 50/60Hz**Includes light source:** yes**Type of equipment:** ED, DALI**OPTICAL DATA****Light distribution:** rotationally-symmetric**Way of lighting:** direct**Reflector:** polished faceted**GENERAL DATA****Lifetime (L80B10):** 60 000 h**Warranty:** 5 years**Application:** public utility facilities, delicatessen, supermarkets, shopping centers, offices, car showrooms, pathways, halls, classrooms, corridors, flats

Code	Luminaire power [W]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra
03060X.XL01.3X1	6	700	117	3000	≥80
03060X.XL02.3X1	6	700	117	4000	≥80
03060X.XL01.3X3	6	700	117	3000	≥80
030603.XL01.3X3	6	720	120	3000	≥80
03060X.XL01.3X3	6	720	120	3000	≥80
03060X.XL02.3X3	6	700	117	4000	≥80

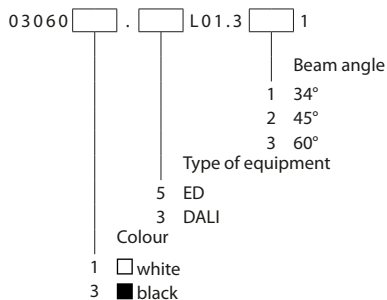

Code	Dimensions [mm] W H	Mounting dimensions [mm] ØS	Pallet quantity	Quantity in package	Net weight [kg]
03060X.XL01.3X1	55 47	48	360	1	0.2
03060X.XL02.3X1	55 47	48	360	1	0.2
03060X.XL01.3X3	55 47	48	360	1	0.2
030603.XL01.3X3	55 47	48	360	1	0.2
03060X.XL01.3X3	55 47	48	360	1	0.2
03060X.XL02.3X3	55 47	48	360	1	0.2

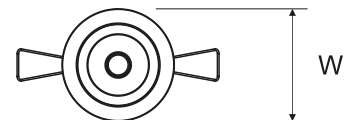

Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.



Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com

Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.

The parameters in the data sheet are given for Ta=25°C.

OTHER PICTURES

INTO R family

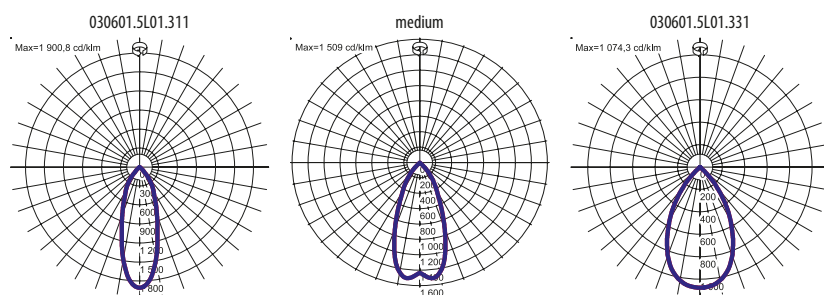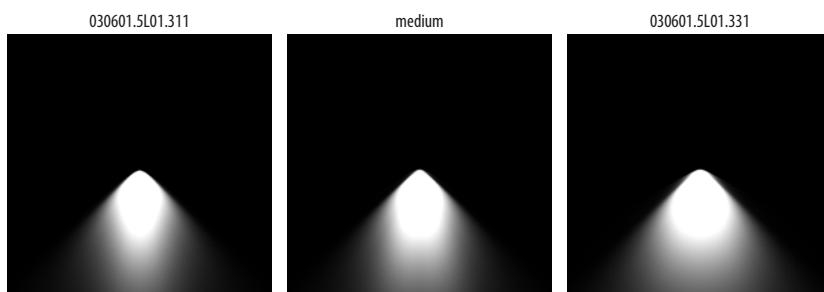LIGHT BEAM CURVES**WAY OF LIGHTING**

Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com

Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.

The parameters in the data sheet are given for $T_a=25^{\circ}\text{C}$.