


Tour_PD4






Pendant Luminaires | topLED 114 W 24 V | CRI 80
64573W00

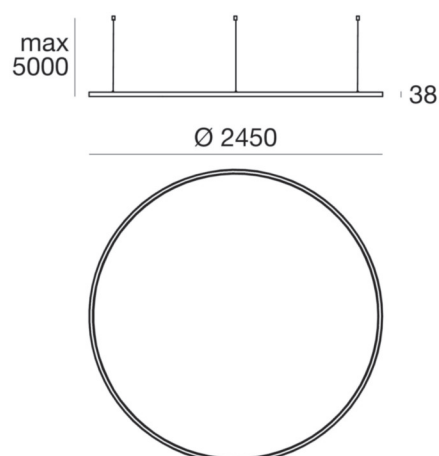

Technical data	
Installation position	Ceiling
Installation environment	Indoor
Light Source	LED
Optics	General Lighting
Light emission direction	downward
Power	114 W
Luminous flux (source)	15588 lm
Tensione	24V
CCT / Tonalità	3000 K
Colour rendering index	80 Ra
C.C. / C.V.	CV
Energy class	A
Safety class	3
IP	IP40
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Operating temperature	-20°C / +50°C
Driver included	No
Induzione	No
Emergency mode	No
Motion sensor	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No

Finishing casing	
Material	Aluminium
Colour	embossed white RAL 9003
Processing	Coating

Electronics		
	1-10V Multi Power 190~250V AC 150 W	99332
	On/Off Driver 190~250V AC 150 W	99331
	DALI Controller	64576

Pendant Luminaires | topLED 114 W 24 V | CRI 80
64573W00

Single emission pendant luminaires for indoor application. The warm white LED light source with a general lighting light distribution is composed of 588 topped LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 15588 lm, with a 136.7 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a embossed white ral 9003 finish, processed by means of coating. The ingress protection degree is IP40; the total weight is of 11 kg. The power supply driver is not provided and is to be ordered separately.


The total absorbed power is 114 W.

The device features protection class III and can be ceiling-mounted.

Illuminotechnical Features	
Light Output Ratio (LOR)	46 %
Luminous flux (source)	15588 lm
Luminaire luminous flux	7210 lm
Consumption	128 W
Luminaire efficacy	56 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	2 Step MacAdam
Colour rendering index	80 Ra

UGR	
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	< 19
UGR axial	< 19

OPTICAL	
Light distribution simmetry	Symmetrical
Ottica C0/C180	152°

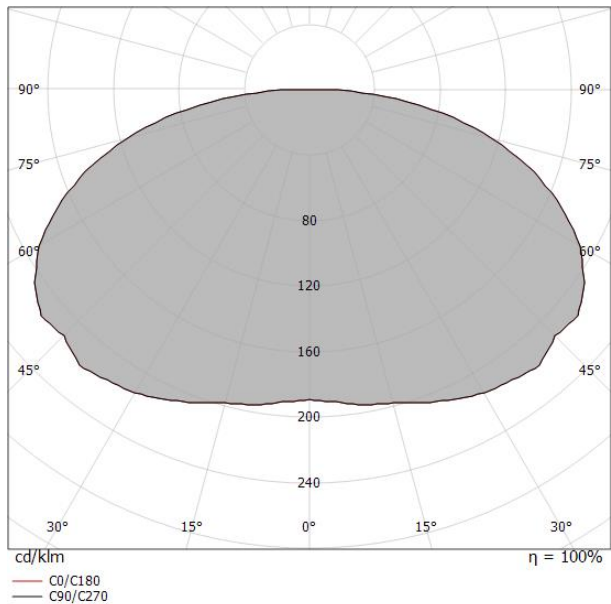

0.5	4.01	E(0°) E(C0)	76.0°	5453 45
1.0	8.02	E(0°) E(C0)	76.0°	1363 11
1.5	12.03	E(0°) E(C0)	76.0°	606 5
2.0	16.04	E(0°) E(C0)	76.0°	341 3
2.5	20.05	E(0°) E(C0)	76.0°	218 2
3.0	24.06	E(0°) E(C0)	76.0°	151 1
Distance [m] Cone diameter [m]		Illuminance [lx]		
— C0/C180 (Half-peak divergence: 152.0°)				

Tour_PD4 | Pendant Luminaires | Accessories
64573W00

	Suspensions	<div>Code</div> <div>64575</div>
	Fixing base	<div>Code</div> <div>64580</div>
	Fixing base	<div>Code</div> <div>64588</div>