

DATA SHEET

NEBRASKA



Nebraska V3 2W LED IP65 Maint. 3Hr
 Lithium c/w ISO Legends

IP65 LED Slim Emergency Bulkhead
 Geartray Fixed to Diffuser For Easy Access
 Mains Connection Block for Loop in / Loop out



GENERAL INFORMATION	
Product Code	NNE/2/LED/M3/LITH/ISO/V3
Product Range	Nebraska
Product Category	Emergency
Fixing Method	Surface/Recessed
IP Rating	65
IK Rating	N/A
Warranty	5 Years Unlimited Hours
DIMENSION/WEIGHT	
Dimensions (L x W x D) (mm)	L=352, W=110, D=65
Cut-out Size (mm)	N/A
Product Weight (Kg)	0.8
CONSTRUCTION	
Body Material	PC
Body Colour	White
Optical Material	N/A
Optical Finish	N/A
Termination	4x2x2.5mm sq. Push In Terminal
Driver - Integral or Remote	Integral
PACKAGING	
Carton Dimensions (mm)	N/A
Quantity per Outer Carton	N/A
Total Weight incl. Carton (Kg)	N/A

LUMINAIRE PERFORMANCE	
Energy Rating	N/A
Luminaire Lumens (lm)	175
Power Consumption (W)	2
Efficacy (l.lm/c.W)	0
Operating Temp. (Min/Max)	0°C - 25 °C
LIGHT SOURCE	
Type	LED
Correlated Colour Temp.	N/A
Colour Rendering Index (CRI)	N/A
Lumen Depreciation	L80:B10 50000
SDCM	N/A
ELECTRICAL INPUT	
Voltage (V)	220-240V AC
Operating Frequency	50
In Rush	N/A
Drivers per MCB*	N/A
Class	Class 2
Power Factor	N/A
Cable Entry	Multiple
ELECTRICAL OUTPUT	
Forward Current (mA)	N/A
Forward Voltage (Vf)	N/A
EMERGENCY DATA	
Mode of Operation	Maintained
Battery Duration	3 Hours
Battery Type	LiFePO4
Battery Specification	3.2V 1.1Ah
Ballast Lumen Factor (BLF)	N/A
DIMMING	
DALI	N/A
OTHER	N/A
Switch Dim	N/A
Corridor Function	N/A
SENSORS	
Microwave	N/A
PIR	N/A
STANDARDS/APPROVALS	
CE Marked	Yes
Certificate of Conformity	Yes
Accreditations	N/A
BARCODE	
EAN Number	5055943085916

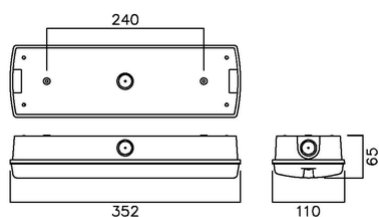

* GUIDE ONLY