
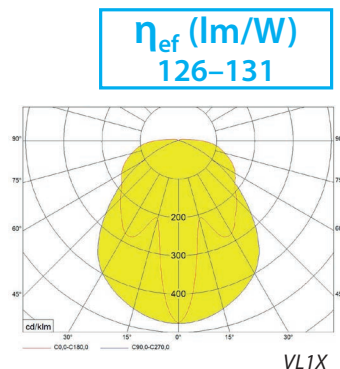


VL1X

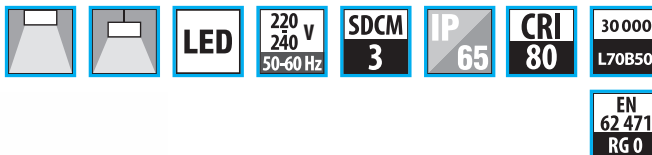


LED waterproof light fittings

Body:
PC, white painted (RAL 9016) metal sheet, INOX clips

Optic:
PC - polycarbonate clear cover

Accessories:
ZH/UNI4 – universal 4-wires suspension
Protection grid - OM

Note:
Stainless bracket for surface mounting or suspension and 2 gro mmetts IP65 are included.
Light fittings VL1X can be installed only into standard ambient conditions, T_a max 25°C

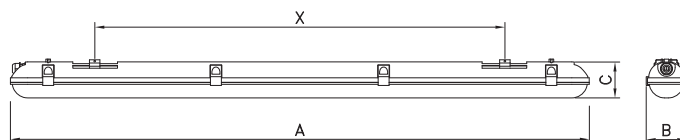

2200	2700	3000	4000	5700	6500	MIX	RGB	
×	×	○	●	○	○	×	×	×
●	×	○	×	×	×	×	×	×

● default ○ optional × not possible

	W	lm	A	B	C	X	kg
VL1X M	38	4 800	1270	86	90	900	2,2
VL1X L	58	7 600	1570			1200	3

lm - luminaire light output

