


Flow Symmetri}^}

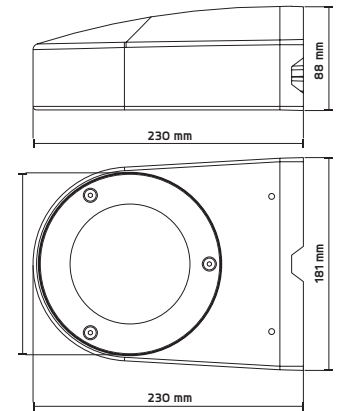

G' Bfc

I ÁF í ÁF€
I ÁF í ÁFF

Hmddj

Flow Symmetri}^} 20W 3000K
Flow Symmetri}^} 36W 3000K

J}fj

T ~•cæ
T ~•cæ

HY_bjgYh'hjYXch


Valonlähde	Q}c^*! [äc~ÁŠÖÖ
U]cää\æ	P^äbæ•cä []cää\æ
Väriämpötila	H€€€S
Valovirta	G€Y ÁÉÁF7 í€ { H Í Y ÁÉÁ30€€ {
Elinikä	í €€€€@ÁŠ í €
Kokonaisteho	G€Y ÁÉÁG1É6 Y H Í Y ÁÉÁH9É7 Y
Rê} }äc^	GG€€G í €XÁ í €D í €P:
ÜÖÖT	H
Valonjakauma	Š^c^ÁÉÁ•^ { { ^cá}^ ^}
Ü ~ [cæ~•] ~ [\ \æÁ	Q
Kotelointiluokka	QÚT í ÁÇÓÚ í Á~ êçæ []æD
Ó}^! *ææ] ~ [\ \æÁ	CEÉ
Ü ~ } \ [{ æc^! äææ] ä	CE ~ { ä } äææ
T ~ ~ Á { æc^! äææ] ä	Sæ! \æä•c~ Á æ•ä
ŠÖÖÉ äæcê } cê æäc^	Q}c^*! [äc~ÉÁ@ä { { ^} } ^ccêçê
Himmennettävä	S~]ê
Liitäntä	Ketjutettava, 3x2,5 mm ²
Puhdistus	T ä^c [Á•æä]] ~æb] ä ~ [•

Mitat

Syvyys	230 mm
Leveys	181 mm
Korkeus	88 mm

Lisätarvikkeet

45 155 15	Flow Pylväsikiinnike, 60mm pylvään päähän, musta
45 155 16	Flow Varsikiinnike, 42-48mm varteen, musta
45 155 14	Flow Kulmakiinnike, musta



Kan användas med eller utan distansram för utanpåliggande kabeldragning



Distansfeste (inkludert)



Hjørnebrakett



Mastetopp



Armfeste



LUZONSE FLOW
20W / 36W

This light fixture has built-in diode light sources

A++
A+
A
C
D
E } LED

The LED module in this luminaire may be replaced by a certified electrician.

874/2012