

HUNTSVILLE IP65 BULKHEAD LUMINAIRE INSTRUCTIONS

Issue 02 on 21st October 2020


THANK YOU for buying this product. To help ensure it gives complete satisfaction please install it according to these instructions and then pass the instructions to the appropriate person for retention and future reference.

SAFETY This is a mains powered product. It is designed to be installed by suitably qualified personnel only and in accordance with the applicable building and electrical regulations. Before installation or maintenance the electrical supply to the product must be isolated.



INSTALLATION SUPPORT If installation advice or accessories are required please contact us at the above address. We will do our best to help. When reporting a suspected fault or seeking installation support the problem is likely to be resolved most quickly if you have full product details to-hand, as well as details of when and where it was purchased.

INSTALLATION

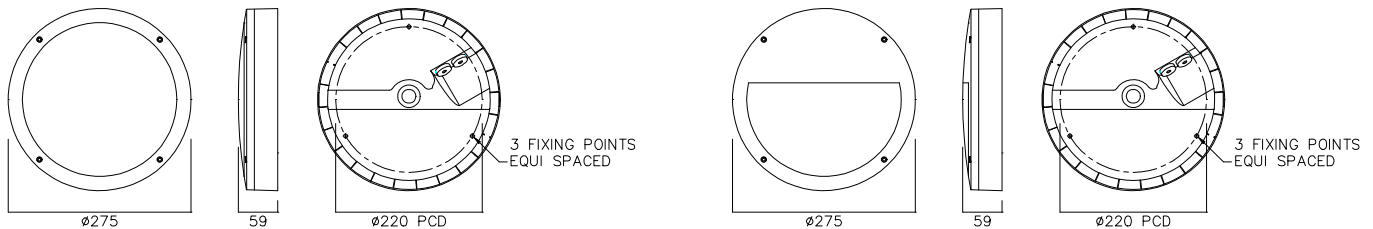

Plain Trim

Eyelid Trim

1. Remove the front bezel from the base by undoing the four fixing screws. A 3mm allen key is provided.
2. Rotate the opal diffuser clockwise to align the pegs with the clearance slots in the body & remove.
3. Disconnect the male/female connectors on the DC cable to fully remove diffuser.
4. Prepare the mains supply cable & fixing points on the chosen mounting surface ensuring it can retain the weight of the luminaire.

Note! If the cable is to enter through the side wall then a suitable aperture will need to be drilled, ensuring it is aligned with the rear cable channel

5. Pass the mains supply cable through one of the holes c/w grommets provided in the base, offer the base to the mounting surface & secure using the screws provided.

Note! It is the installer's responsibility to ensure the fixing points & cable entry point are appropriately sealed to maintain the IP65 rating

6. Route the mains supply cable to the terminal block on the gear tray & terminate ensuring correct polarity is observed

Note! This is a Class II luminaire, so no earth is required, however there is an extra terminal to 'park' any earth wires

7. Select the required CCT using the slider switch in the base:

WW = Warm White = 3000K
 NW = Neutral White = 4000K
 CW = Cool White = 5700K

8. Reconnect the DC lead from the diffuser to the main body using the male & female connectors.
9. Refit the diffuser by aligning the lugs with the slots in the body & rotating anti-clockwise to engage.
10. Refit the front bezel & secure using the four fixing screws, taking care not to over tighten.
11. Reconnect power supply & check for correct operation.

Note! Luminaires fitted with electronic drivers are exempt from insulation resistance tests as this may cause damage to the components.