

**Tuotetiedot**

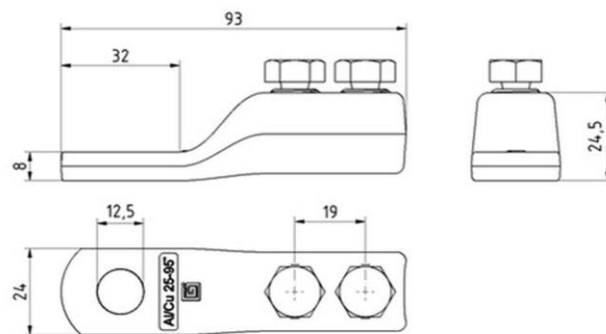
Tuotekoodi	<b>VB05-0002</b>	Sähkönumero	<b>5201182</b>	EAN-koodi	<b>6410052011826</b>
Tuotenimi	Al-kaapelikenkä ROLA 25-95			ETIM-luokka	<b>EC001054</b>
Johtimet	Al/Cu 25-95 mm <sup>2</sup>				

**Tekniset tiedot**

		-	
		-	
Nimellisjännite (IEC)		<b>1000</b>	V
		-	
		-	
Napaluku		<b>1</b>	kpl
Max. Johdinkoko		<b>95</b>	mm <sup>2</sup>
Kiristysmomentti	25-95 mm <sup>2</sup>	<b>21-27</b>	Nm
		-	
		-	
		-	
		-	
Paino		<b>107</b>	g
		-	
Standardit	<b>EN IEC 61238-1-1:2019</b>		
Väri / Materiaali	<b>Tinapinnoitettu alumiini</b>		
Kiinnitys / Kytkenä	<b>Momenttiruuvi M14x1,5 (2 kpl)</b>		


**Kuvaus**

Momenttiruuveilla varustettu ruuvattava alumiininen kaapelikenkä soveltuu sekä Al- että Cu-kaapeleille. Kytkenä tehdään momenttiruuvien avulla. Liittimen mukana toimitetaan kartioaluslaatta ja 2 kpl:tta paineentasauslaattoja.

**Mittakuva**

**Pakkaus**

Pakkausmuoto	<b>Pussi</b>	Kpl / Pakkaus	<b>3</b>	Paino [kg]	<b>0,32</b>
Pituus [mm]	<b>93</b>	Leveys [mm]	<b>72</b>	Korkeus [mm]	<b>34</b>

**Ouneva Oy**

Teollisuustie 21  
FI-82730 Tuupovaara  
Finland

[www.ounevagroup.fi](http://www.ounevagroup.fi)

[www.ounevaproducts.fi](http://www.ounevaproducts.fi)

**Product data**

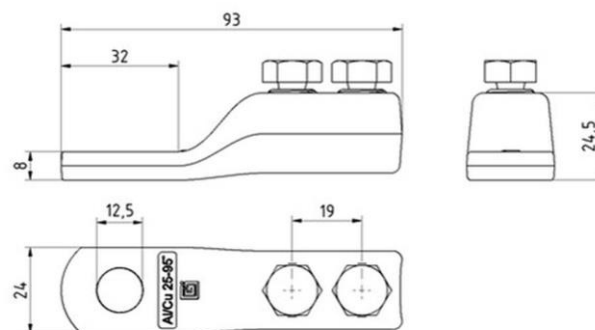
Product code	<b>VB05-0002</b>	STK-code	<b>5201182</b>	EAN-code	<b>6410052011826</b>
Product name	Shear bolt cable lug ROLA 25-95			ETIM class	<b>EC001054</b>
Wires	Al/Cu 25-95 mm <sup>2</sup>				

**Technical data**

		-	
		-	
Nominal voltage (IEC)		<b>1000</b>	V
		-	
		-	
Number of poles		<b>1</b>	pcs
Max. Cross section		<b>95</b>	mm <sup>2</sup>
Tightening torque			
	25-95 mm <sup>2</sup>	<b>21-27</b>	Nm
		-	
		-	
		-	
		-	
Weight		<b>107</b>	g
		-	
Standards	<b>EN IEC 61238-1-1:2019</b>		
Color / Material	<b>Tin plated aluminium</b>		
Mounting / Connection	<b>Shear head screws M14x1,5 (2 pcs)</b>		


**Description**

Shear bolt cable lugs are suitable for aluminium and copper conductors. Solid, stranded, sector shaped and circular conductors are allowed. The installation can be performed with shear head screws and torque tools are not needed. ROLA connectors are delivered with a conical washer and two flat pressure washers.

**Drawing**

**Package**

Package	<b>Bag</b>	Pcs / Package	<b>3</b>	Weight [kg]	<b>0,32</b>
Length [mm]	<b>93</b>	Width [mm]	<b>72</b>	Height [mm]	<b>34</b>

**Ouneva Oy**

Teollisuustie 21  
FI-82730 Tuupovaara  
Finland

[www.ounevagroup.fi](http://www.ounevagroup.fi)

[www.ounevaproducts.fi](http://www.ounevaproducts.fi)