

Tuotetiedot

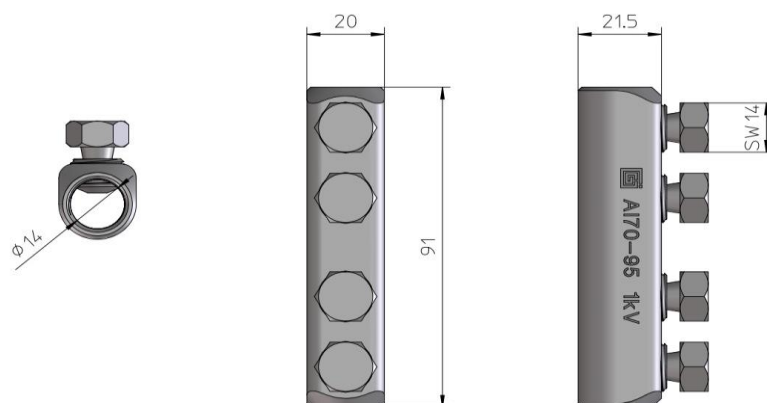
Tuotekoodi	VB04-0017	Sähkönumero	5201706	EAN-koodi	6410052017064
Tuotenimi	1 kV Jatkoliitin Al 70-95 mm ² 4-ruuvinen			ETIM-luokka	EC001063
Johtimet	Al 70-95 mm ²				

Tekniset tiedot

	-	
	-	
Nimellisjännite (IEC)	1000	V
	-	
	-	
	-	
Napaluku	1	kpl
Max. Johdinkoko	95	mm ²
	-	
	-	
	-	
	-	
	-	
	-	
Paino	65	g
	-	
Standardit	EN IEC 61238-1-1:2019	
Väri / Materiaali	Alumiini, ei pinnoitusta	
Kiinnitys / KytKentä	Momenttiruuvi	


Kuvaus

Momenttiruuveilla varustettu ruuvattava alumiininen jatkoliitin soveltuu alumiinikaapeleiden liittämiseen. KytKentä tehdään momenttiruuvien avulla. Liittimisä on valmiiksi liitosrasvatut kytKentätilat. Jatkoliitin soveltuu sekä pyöreille että sektorin muotoisille kerratuille kaapeleille.

Mittakuva

Pakkaus

Pakkausmuoto	Pussi	Kpl / Pakkaus	4	Paino [kg]	0,28
Pituus [mm]	96	Leveys [mm]	160	Korkeus [mm]	25

Ouneva Oy

Teollisuustie 21
 FI-82730 Tuupovaara
 Finland

Tel. +358 400 179 750
info@ouneva.fi

www.ounevagroup.fi
www.ounevaproducts.fi

Product data

Product code	VB04-0017	STK-code	5201706	EAN-code	6410052017064
Product name	1 kV Shear-type splice sleeve Al 70-95 mm² 4-screw			ETIM class	EC001063
Wires	Al 70-95 mm²				

Technical data

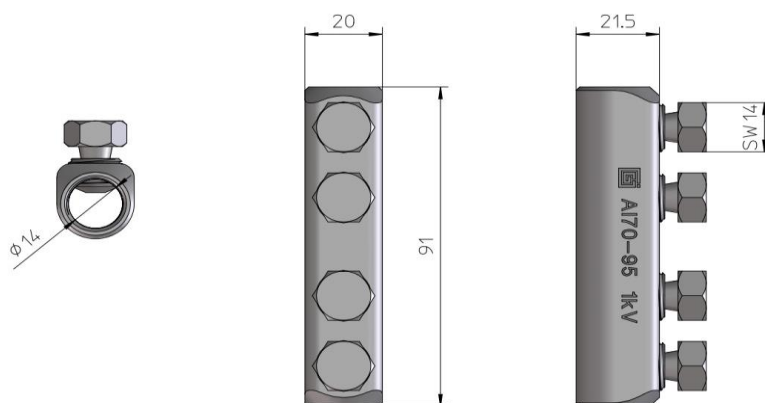
	-	
	-	
Nominal voltage (IEC)	1000	V
	-	
	-	
	-	
Number of poles	1	pcs
Max. Cross section	95	mm ²
	-	
	-	
	-	
	-	
	-	
	-	
Weight	65	g
	-	



Standards	EN IEC 61238-1-1:2019
Color / Material	Aluminium, no coating
Mounting / Connection	Shear head screws

Description

Shear bolt splice connectors are suitable for aluminium conductors. Stranded, sector shaped and circular conductors are allowed. The installation can be performed with shear head screws.

Drawing

Package

Package	Bag	Pcs / Package	4	Weight [kg]	0,28
Length [mm]	96	Width [mm]	160	Height [mm]	25

Ouneva Oy

Teollisuustie 21
FI-82730 Tuupovaara
Finland

Tel. +358 400 179 750
info@ouneva.fi

www.ounevagroup.fi
www.ounevaproducts.fi