

Tuotetiedot

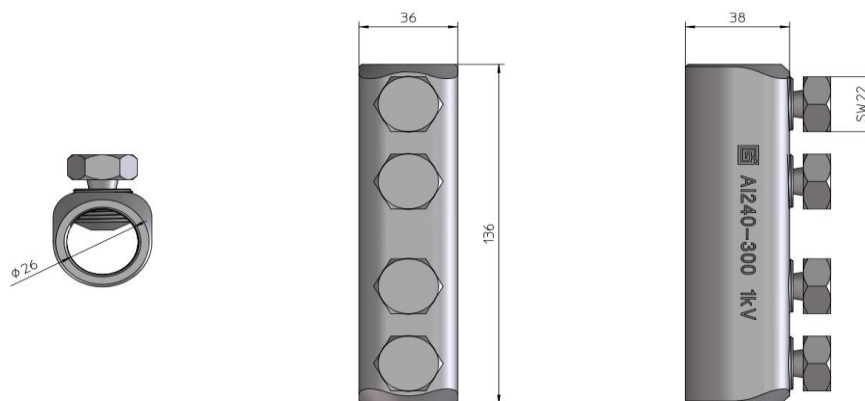
Tuotekoodi	VB04-0019	Sähkönumero	5201708	EAN-koodi	6410052017088
Tuotenimi	1 kV Jatkoliitin Al 240-300 mm ² 4-ruuvinen			ETIM-luokka	EC001063
Johtimet	Al 240-300 mm ²				

Tekniset tiedot

	-	
	-	
Nimellisjännite (IEC)	1000	V
	-	
	-	
	-	
Napaluku	1	kpl
Max. Johdinkoko	300	mm ²
	-	
	-	
	-	
	-	
	-	
	-	
Paino	309	g
	-	
Standardit	EN IEC 61238-1-1:2019	
Väri / Materiaali	Alumiini, ei pinnoitusta	
Kiinnitys / Kytcentä	Momenttiruuvi	


Kuvaus

Momenttiruuveilla varustettu ruuvattava alumiininen jatkoliitin soveltuu alumiinikaapeleiden liittämiseen. Kytcentä tehdään momenttiruuvien avulla. Liittimissä on valmiiksi liitosrasvatut kytcentätilat. Jatkoliitin soveltuu sekä pyöreille että sektorin muotoisille kerratuille kaapeleille.

Mittakuva

Pakkaus

Pakkausmuoto	Pussi	Kpl / Pakkaus	4	Paino [kg]	1,26
Pituus [mm]	141	Leveys [mm]	214	Korkeus [mm]	41

Ouneva Oy

Teollisuustie 21
 FI-82730 Tuupovaara
 Finland

Tel. +358 400 179 750
info@ouneva.fi

www.ounevagroup.fi
www.ounevaproducts.fi

Product data

Product code	VB04-0019	STK-code	5201708	EAN-code	6410052017088
Product name	1 kV Shear-type splice sleeve Al 240-300 mm ² 4-screw			ETIM class	EC001063
Wires	Al 240-300 mm ²				

Technical data

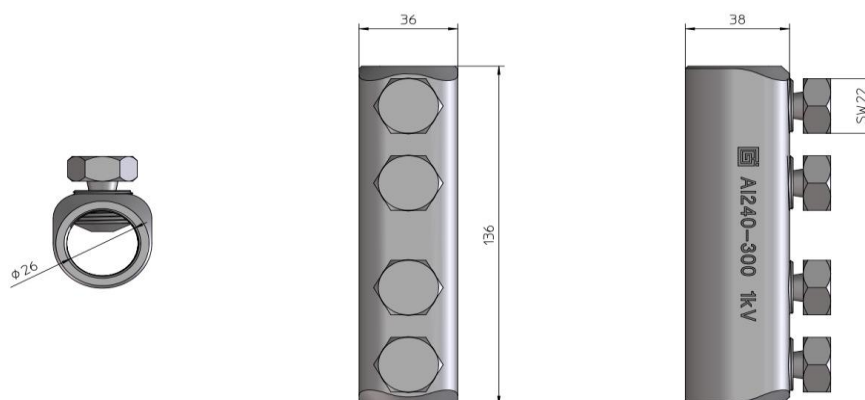
	-	
	-	
Nominal voltage (IEC)	1000	V
	-	
	-	
	-	
Number of poles	1	pcs
Max. Cross section	300	mm ²
	-	
	-	
	-	
	-	
	-	
	-	
Weight	309	g
	-	



Standards	EN IEC 61238-1-1:2019
Color / Material	Aluminium, no coating
Mounting / Connection	Shear head screws

Description

Shear bolt splice connectors are suitable for aluminium conductors. Stranded, sector shaped and circular conductors are allowed. The installation can be performed with shear head screws.

Drawing

Package

Package	Bag	Pcs / Package	4	Weight [kg]	1,26
Length [mm]	141	Width [mm]	214	Height [mm]	41

Ouneva Oy

Teollisuustie 21
 FI-82730 Tuupovaara
 Finland

Tel. +358 400 179 750
info@ouneva.fi

www.ounevagroup.fi
www.ounevaproducts.fi