

Tuotetiedot

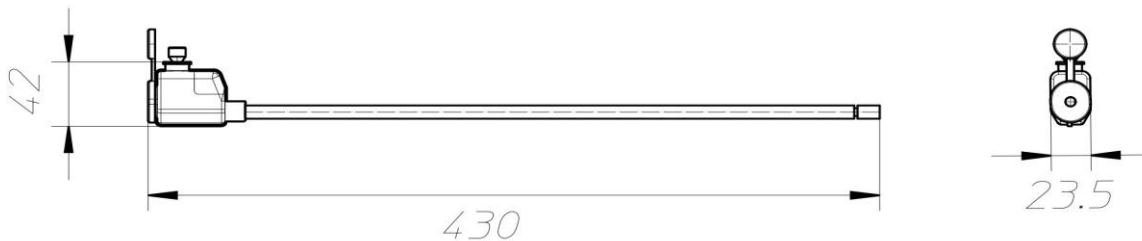
Tuotekoodi	VA03-0114	Sähkönumero	5201730	EAN-koodi	6410052017309
Tuotenimi	Eristyksen läpäisevä jatkoliitin Al 25-50 / Cu 16 mm ² Si			ETIM-luokka	EC001059
Johtimet	1xAl 25-50 / Cu 16 mm ²				

Tekniset tiedot

Nimellisvirta (IEC)	Cu	80	A
	Al	80	A
Nimellisjännite (IEC)		1000	V
		-	
		-	
Napaluku		1	kpl
Max. Johdinkoko		50	mm ²
		-	
		-	
		-	
		-	
Käyttölämpötila		80	°C
Paino		120	g
IP-suojaus		IP43	
Standardit	EN 61238-1:2003; EN 60529:1991 + A1:2000 + A2:2013		
Väri / Materiaali	PC/Tinapinnoitettu alumiini		
Kiinnitys / Kytkenä	Vapaasti kaapelissa		


Kuvaus

Momenttiruuvilla asennettava jatkosliitin on tarkoitettu kuorimattoman kaapelin asentamiseen kosketussuojaukselta vaativissa olosuhteissa. Liittimeen kytketty 400 mm hienosäikeinen kuparijohdin.

Mittakuva

Pakkaus

Pakkausmuoto	Laatikko	Kpl / Pakkaus	9	Paino [kg]	1,28
Pituus [mm]	450	Leveys [mm]	100	Korkeus [mm]	100

Ouneva Oy

Teollisuustie 21
FI-82730 Tuupovaara
Finland

www.ounevagroup.fi

www.ounevaproducts.fi

Product data

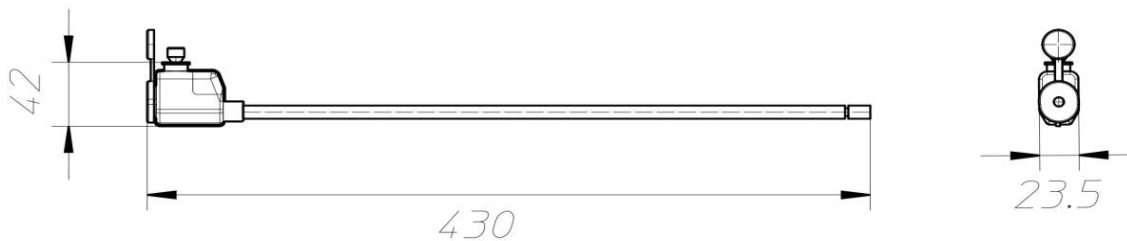
Product code	VA03-0114	STK-code	5201730	EAN-code	6410052017309
Product name	Splice connector for unstripped cable Al 25-50 / Cu 16 mm ² Blue			ETIM class	EC001059
Wires	1xAl 25-50 / Cu 16 mm ²				

Technical data

Nominal current (IEC)	Cu	80	A
	Al	80	A
Nominal voltage (IEC)		1000	V
		-	
		-	
		-	
Number of poles		1	pcs
Max. Cross section		50	mm ²
		-	
		-	
		-	
		-	
Operating temperature		80	°C
Weight		120	g
IP-protection		IP43	
Standards	EN 61238-1:2003; EN 60529:1991 + A1:2000 + A2:2013		
Color / Material	PC/Tin plated aluminium		
Mounting / Connection	On cable		


Description

Shear bolt splice connector can be used for unstripped cables in ingress protection demanding conditions. Assembly includes 400 mm fine stranded conductor.

Drawing

Package

Package	Box	Pcs / Package	9	Weight [kg]	1,28
Length [mm]	450	Width [mm]	100	Height [mm]	100

Ouneva Oy

Teollisuustie 21
FI-82730 Tuupovaara
Finland

www.ounevagroup.fi

www.ounevaproducts.fi