

**Tuotetiedot**

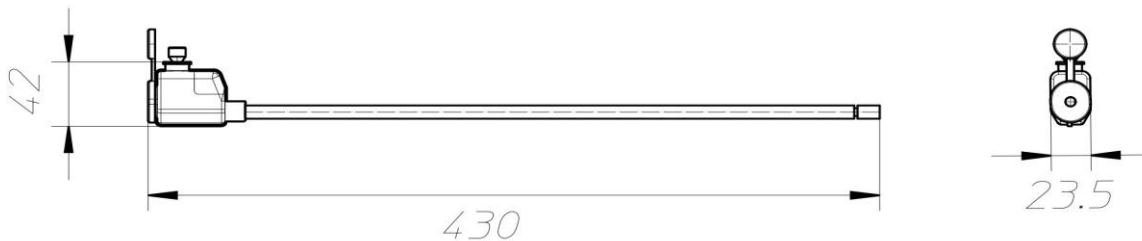
Tuotekoodi	<b>VA03-0116</b>	Sähkönumero	<b>5201732</b>	EAN-koodi	<b>6410052017323</b>
Tuotenimi	Eristyksen läpäisevä jatkoliitin Al 25-50 / Cu 16 mm <sup>2</sup> Ru			ETIM-luokka	<b>EC001059</b>
Johtimet	1xAl 25-50 / Cu 16 mm <sup>2</sup>				

**Tekniset tiedot**

Nimellisvirta (IEC)	Cu	<b>80</b>	A
	Al	<b>80</b>	A
Nimellisjännite (IEC)		<b>1000</b>	V
		-	
		-	
Napaluku		<b>1</b>	kpl
Max. Johdinkoko		<b>50</b>	mm <sup>2</sup>
		-	
		-	
		-	
		-	
Käyttölämpötila		<b>80</b>	°C
Paino		<b>120</b>	g
IP-suojaus		<b>IP43</b>	
Standardit	<b>EN 61238-1:2003; EN 60529:1991 + A1:2000 + A2:2013</b>		
Väri / Materiaali	<b>PC/Tinapinnoitettu alumiini</b>		
Kiinnitys / Kytkenä	<b>Vapaasti kaapelissa</b>		


**Kuvaus**

Momenttiruuvilla asennettava jatkosliitin on tarkoitettu kuorimattoman kaapelin asentamiseen kosketussuojaukselta vaativissa olosuhteissa. Liittimeen kytketty 400 mm hienosäikeinen kuparijohdin.

**Mittakuva**

**Pakkaus**

Pakkausmuoto	<b>Laatikko</b>	Kpl / Pakkaus	<b>9</b>	Paino [kg]	<b>1,28</b>
Pituus [mm]	<b>450</b>	Leveys [mm]	<b>100</b>	Korkeus [mm]	<b>100</b>

**Ouneva Oy**

Teollisuustie 21  
FI-82730 Tuupovaara  
Finland

[www.ounevagroup.fi](http://www.ounevagroup.fi)

[www.ounevaproducts.fi](http://www.ounevaproducts.fi)

**Product data**

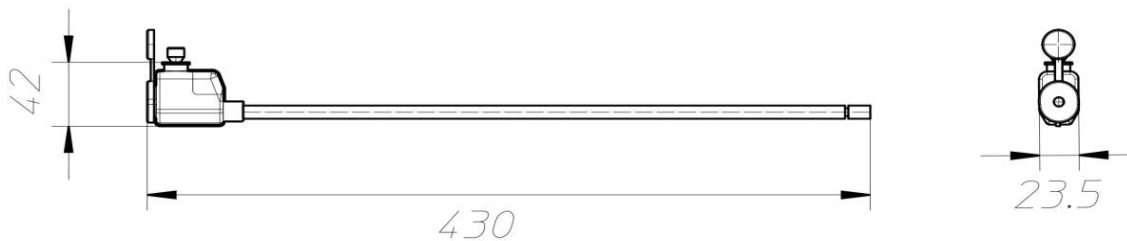
Product code	<b>VA03-0116</b>	STK-code	<b>5201732</b>	EAN-code	<b>6410052017323</b>
Product name	Splice connector for unstripped cable Al 25-50 / Cu 16 mm <sup>2</sup> Brown			ETIM class	<b>EC001059</b>
Wires	1xAl 25-50 / Cu 16 mm <sup>2</sup>				

**Technical data**

Nominal current (IEC)	Cu	<b>80</b>	A
	Al	<b>80</b>	A
Nominal voltage (IEC)		<b>1000</b>	V
		-	
		-	
		-	
Number of poles		<b>1</b>	pcs
Max. Cross section		<b>50</b>	mm <sup>2</sup>
		-	
		-	
		-	
		-	
Operating temperature		<b>80</b>	°C
Weight		<b>120</b>	g
IP-protection		<b>IP43</b>	
Standards	<b>EN 61238-1:2003; EN 60529:1991 + A1:2000 + A2:2013</b>		
Color / Material	<b>PC/Tin plated aluminium</b>		
Mounting / Connection	<b>On cable</b>		


**Description**

Shear bolt splice connector can be used for unstripped cables in ingress protection demanding conditions. Assembly includes 400 mm fine stranded conductor.

**Drawing**

**Package**

Package	<b>Box</b>	Pcs / Package	<b>9</b>	Weight [kg]	<b>1,28</b>
Length [mm]	<b>450</b>	Width [mm]	<b>100</b>	Height [mm]	<b>100</b>

**Ouneva Oy**

Teollisuustie 21  
FI-82730 Tuupovaara  
Finland

[www.ounevagroup.fi](http://www.ounevagroup.fi)

[www.ounevaproducts.fi](http://www.ounevaproducts.fi)