

Tuotetiedot

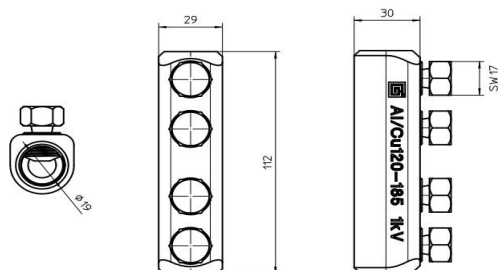
Tuotekoodi	VB04-0042	Sähkönumero	5201749	EAN-koodi	6430051860058
Tuotenimi	Al/Cu Jatkoliitin 120-185 mm ² 4-ruuvinen 1 kV			ETIM-luokka	EC001063
Johtimet	Al/Cu 120-185 mm ²				

Tekniset tiedot

		-	
		-	
Nimellisjännite (IEC)		1000	V
		-	
		-	
Napaluku		1	kpl
Max. Johdinkoko		185	mm ²
		-	
		-	
		-	
		-	
		-	
Paino		184	g
		-	
Standardit	EN IEC 61238-1-1:2019		
Väri / Materiaali	Tinapinnoitettu alumiini		
Kiinnitys / Kytkenä	Momenttiruuvi		


Kuvaus

Momenttiruuveilla ja väliseinällä varustettu ruuvattava alumiininen jatkoliitin soveltuu alumiini- ja kuparikaapeleiden liittämiseen. Kytkenä tehdään momenttiruuvien avulla. Liittimissä on valmiiksi liitosrasvatut kytkentätilat. Jatkoliitin soveltuu sekä pyöreille että sektorin muotoisille kerratuille kaapeleille.

Mittakuva

Pakkaus

Pakkausmuoto	Pussi	Kpl / Pakkaus	4	Paino [kg]	0,76
Pituus [mm]	117	Leveys [mm]	160	Korkeus [mm]	31

Ouneva Oy

Teollisuustie 21
FI-82730 Tuupovaara
Finland

www.ounevagroup.fi
www.ounevaproducts.fi

Product data

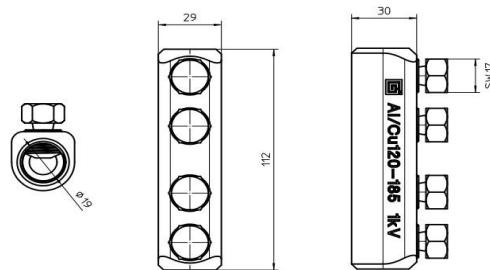
Product code	VB04-0042	STK-code	5201749	EAN-code	6430051860058
Product name	Al/Cu Shear-type splice sleeve 120-185 mm ² 4-screw 1 kV			ETIM class	EC001063
Wires	Al/Cu 120-185 mm ²				

Technical data

Nominal voltage (IEC)	1000	V
Number of poles	1	pcs
Max. Cross section	185	mm ²
Weight	184	g
Standards	EN IEC 61238-1-1:2019	
Color / Material	Tin plated aluminium	
Mounting / Connection	Shear head screws	


Description

Shear bolt splice connectors are suitable for aluminium and copper conductors. Stranded, sector shaped and circular conductors are allowed. The installation can be performed with shear head screws. Connector includes dividing wall so it is suitable for aluminium cable and copper cable coupling.

Drawing

Package

Package	Bag	Pcs / Package	4	Weight [kg]	0,76
Length [mm]	117	Width [mm]	160	Height [mm]	31

Ouneva Oy

Teollisuustie 21
FI-82730 Tuupovaara
Finland

www.ounevagroup.fi

www.ounevaproducts.fi