

PowerWalker VI 2000 LCD

Line-Interactive UPS

2000VA Line-Interactive UPS

2x Schuko + 2x IEC outlets, RJ11/RJ45 Surge Protection


USB Connection for monitoring

LCD display for status view

Built-in boost and buck AVR function



Item-No. 10120020

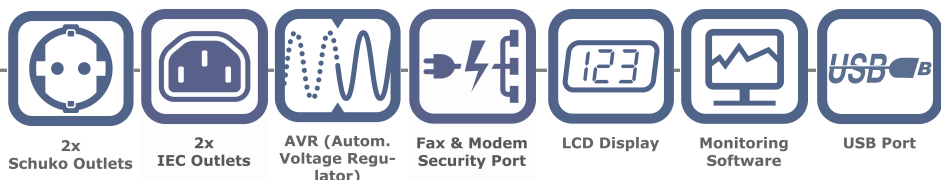

Product Features

PowerWalker VI 2000 LCD is a Line- Interactive UPS which provides high performance and reliable and cost-effective backup power protection. The UPS can be automatically started up without AC power supplied. In addition, this UPS provides RJ11/RJ45 surge protection, and green power function for energy saving. Equipped with a voltage stabilizer, this UPS will continue providing clean and stable power to connected equipment and is perfect for any home or SMB (small medium business) application.


- Super smart charger to shorten charging time
- Built-in boost and buck AVR
- Simulated sine wave
- Auto restart while AC is recovering
- Off-mode charging
- Cold start function
- USB communication port
- RJ11/RJ45 surge protection
- Monitoring software included
- LCD display for status view



Backside view



LCD Display



RJ11/RJ45 surge protection

Technical Details

Product Features

Capacity	2000VA / 1200W
Input	
Voltage	220/230/240VAC
Voltage Range	160-290VAC
Output	
Voltage	220/230/240VAC
Voltage Regulation	± 10 % (Battery Mode)
Frequency	50 or 60Hz
Freq. Regulation	±1 Hz (Battery Mode)
Waveform	Modified Sine wave
Transfer Time	
Typical	2-6ms
Battery	
Type	12V / 9Ah
Quantity	2 x
Recharge Time	4h to 90%
Full Protection	
Discharge	Yes
Overcharge	Yes
Overload	Yes
LCD Display	
LCD Indicators	AC mode, Battery mode, Load level, Battery capacity, Input voltage, Output voltage, Overload alarm, Fault alarm and Low battery alarm.
Audio Indicators	
Battery Mode	Beep every 10sec
Low Battery	Beep every second
Fault	Beep every 0.5sec
Battery Weak	Beep every 2sec
Battery faulty	Continuously sounding

Connections

Communication	USB
Outlets	2x Schuko and 2x IEC
Surge Protection	RJ11/RJ45 (in/out)

Software & System Requirements

Software	ViewPower
Operating System	For details visit: www.powerwalker.com/viewpower.html
Other	1x USB port

Product Details

Dimensions	397 x 146 x 205 mm
Colour	Black
Weight UPS case	12.1kg
Fan Control	Auto OFF: in LINE mode ON: in battery- and AVR mode
Noise Level	< 40dB
Model Code	VI 2000 LCD

Environment

Temperature	0°C – 40°C
Humidity	0 - 90% (non-condensing)

Package Content

Package Content	PowerWalker VI 2000 LCD, Input Power cable, IEC cable, Software CD, USB cable, manual
------------------------	---

Logistic Data

Giftbox Language	EN/DE/FR/ES/IT/PT/SV/FI/NO/TR RU/UA/BY/PL/CZ/HR/HU/BG/KK/SR
Manual Language	EN/DE/FR/ES/IT/PT/SV/FI/NO/TR RU/UA/BY/PL/CZ/HR/HU/BG/KK/SR
Dimension/Giftbox	495 x 230 x 290 mm
Weight/Giftbox	13.1kg
Pieces/Carton	1
Pieces/Palette	42
Item Number	10120020
EAN	4260074972795
Warranty	24 Month (except battery)

Version: EN 16/08/2012

We reserve the right for technical changes and mistakes

Use UPS configurator on www.powerwalker.com for detailed backup time information.

PowerWalker is a brand of:

BlueWalker GmbH

Martin-Buber-Strasse 12 • D-41470 Neuss • Germany

Phone: +49 (0) 2137 / 92 98 73 • Fax: +49 (0) 2137 / 78 73 925

info@bluewalker.eu • www.bluewalker.eu • www.powerwalker.com