

Moisture-proof diffuser luminaire


An IP65 rated LED luminaire for high quality low energy lighting in wet, dusty environments. High quality opal polycarbonate (UV stabilised) diffuser ensures uniform lighting without visible spots. High efficacy, up to 50% energy saving compared with T8 fluorescent. The traditional design gives an aesthetically pleasing appearance – ideal for point for point replacement on refurbishment projects. 3h emergency light.

Body: polycarbonate


Diffuser: opal polycarbonate (UV stabilised)

Brackets: stainless steel

Weight: 2.0 kg

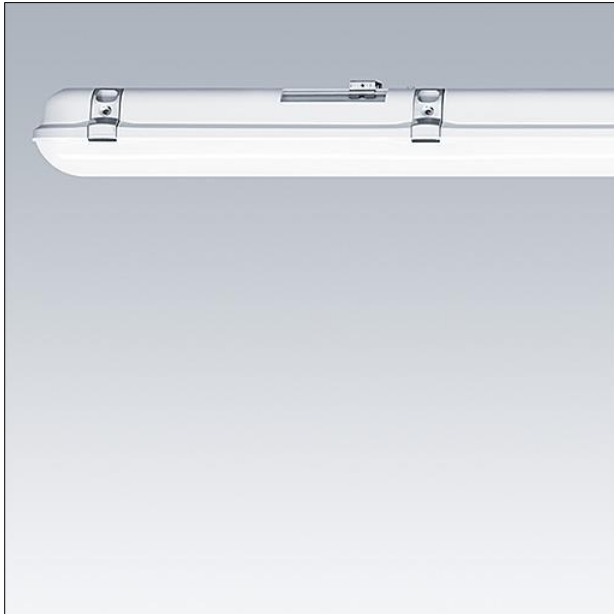


TE_JULIE_F_side.jpg

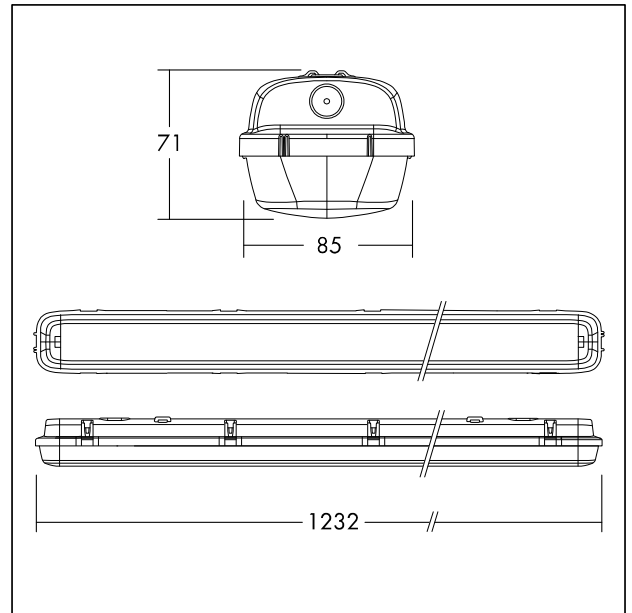

TE_JULIE_M_IILD2_1200_3000lm.wmf

Light Distribution

STD - standard

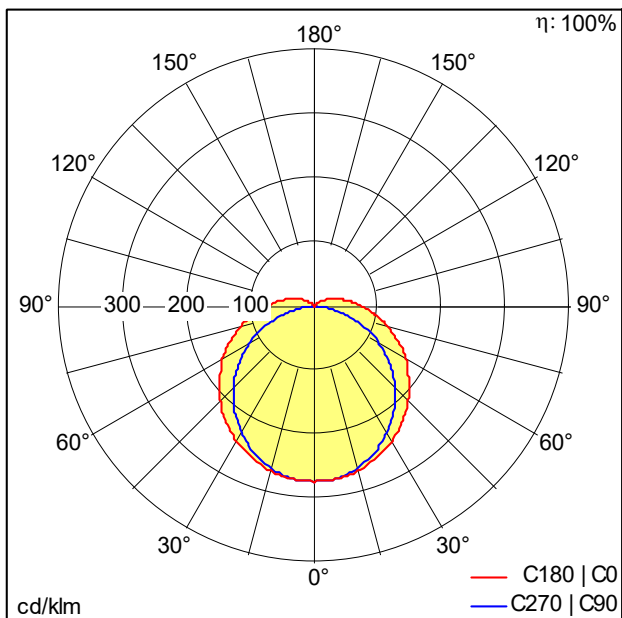

TE_JULIE_1200_LED_IP65_3200_840_E3.ltd

- Light Source: LED
- Luminaire luminous flux*: 3200 lm
- Total emergency luminous flux: 272 lm
- Luminaire efficacy*: 114 lm/W
- Colour Rendering Index min.: 80
- Ballast: 1 x 89800558 <EM TR EM converterLED BASIC 202 NiCd/Ni
- Correlated colour temperature*: 4000 Kelvin
- Chromaticity tolerance (initial MacAdam): 4
- Rated median useful life*: L70 50000 h at 25 °C
- Luminaire input power*: 28 W
- Dimming: Fixed output
- Maintenance category CIE 97: E - Dust-proof IP5X

This product contains a light source of energy efficiency class D.

All values marked with an * are rated values. Connected electrical load and luminous flux are subject to an initial tolerance of +/- 10%, the most similar colour temperature is subject to an initial tolerance of +/- 150K. Unless stated otherwise, the values apply to an ambient temperature of 25°C.