

Moisture-proof diffuser luminaire


An IP65 rated LED luminaire for high quality low energy lighting in wet, dusty environments. High quality opal polycarbonate (UV stabilised) diffuser ensures uniform lighting without visible spots. High efficacy, up to 60% energy saving compared with T8 fluorescent. The traditional design gives an aesthetically pleasing appearance – ideal for point for point replacement on refurbishment projects. 3h emergency light.

Body: polycarbonate


Diffuser: opal polycarbonate (UV stabilised)

Brackets: stainless steel

Weight: 2.6 kg

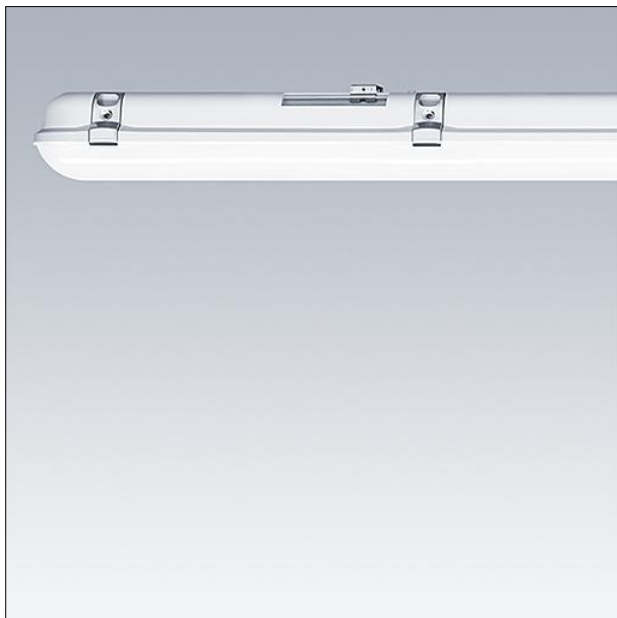


TE_JULIE_F_side.jpg

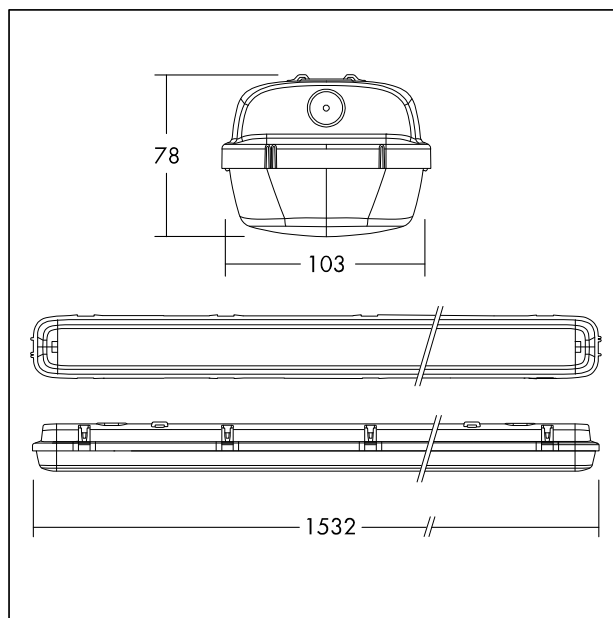

TE_JULIE_M_IILD2_1500_6000lm.wmf

Light Distribution

STD - standard

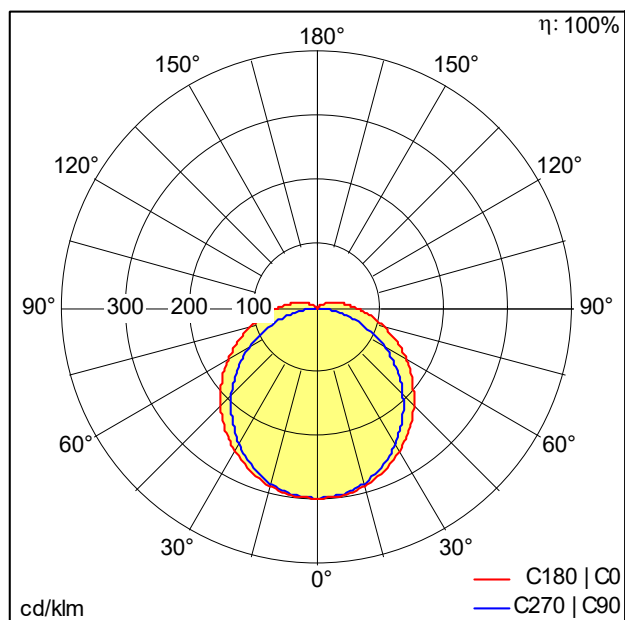

TE_JULIE_1500_LED_IP65_6300_840_E3.lcd

- Light Source: LED
- Luminaire luminous flux*: 6300 lm
- Total emergency luminous flux: 474 lm
- Luminaire efficacy*: 115 lm/W
- Colour Rendering Index min.: 80
- Ballast: 1 x 89800560 EM converter LED BASIC 204 NiCd/NiMH 50V
- Correlated colour temperature*: 4000 Kelvin
- Chromaticity tolerance (initial MacAdam): 4
- Rated median useful life*: L70 50000 h at 25 °C
- Luminaire input power*: 55 W Power factor = 0.9
- Dimming: Fixed output
- Maintenance category CIE 97: E - Dust-proof IP5X
- Total harmonic distortion (THD): 15.00 %