


Tuotetiedot

Tuotekoodi	VG02-0005	Sähkönumero	1914182	EAN-koodi	6410019141825
Tuotenimi	Haaroitusalususta Cu 35-150 2R			ETIM-luokka	EC000897
Johtimet	Cu 35-150 mm ² 2R				

Tekniset tiedot


Nimellisvirta (IEC)	Cu	400	A
		-	
Nimellisjännite (IEC)		750	V
		-	
		-	
		-	
Napaluku		1	kpl
Max. Johdinkoko		150	mm ²
Kiristysmomentti			
	35-150 mm ²	15	Nm
		-	
		-	
		-	
		-	
Käyttölämpötila		80	°C
Paino		175	g
		-	

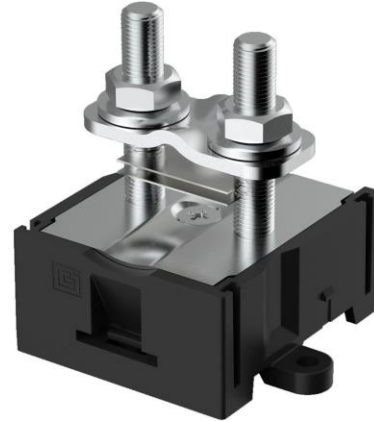

Standardit	EN 60947-7-1:2009
Väri / Materiaali	Musta PA alusta, Teräksinen liitinosa
Kiinnitys / Kytkenä	DIN-kisko- ja ruuvikiinnitys

Kuvaus

Haaroitusalusustoja käytetään Cu-johtimien haaroituksiin ja kytkentöihin sähkökojeistoissa ja laitteissa. Alustat ovat helppo asentaa ja kaikki mallit voidaan kiinnittää joko ruuveilla tai asentaa suoraan DIN-kiskoon.

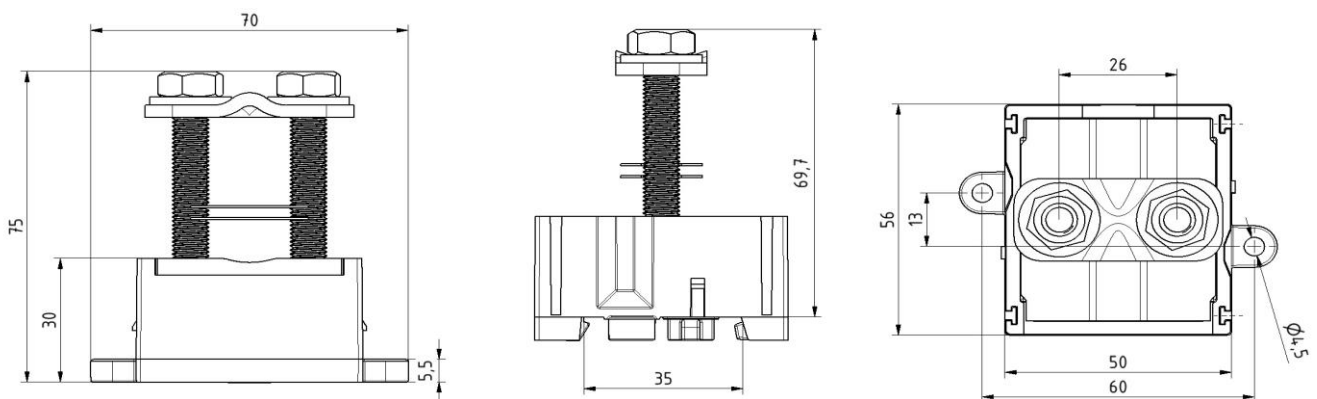Mittakuva

Pakkaus

Pakkausmuoto	Laatikko	Kpl / Pakkaus	15	Paino [kg]	2,74
Pituus [mm]	300	Leveys [mm]	205	Korkeus [mm]	100

Ouneva Oy

Teollisuustie 21
 FI-82730 Tuupovaara
 Finland

Tel. +358 400 179 750
info@ouneva.fi


www.ounevagroup.fi
www.ounevaproducts.fi

Product data

Product code	VG02-0005	STK-code	1914182	EAN-code	6410019141825
Product name	Branching block Cu 35-150 2R			ETIM class	EC000897
Wires	Cu 35-150 mm ² 2R				

Technical data


Nominal current (IEC)	Cu	400	A
		-	
Nominal voltage (IEC)		750	V
		-	
		-	
		-	
Number of poles		1	pcs
Max. Cross section		150	mm ²
Tightening torque			
	35-150 mm ²	15	Nm
		-	
		-	
		-	
		-	
Operating temperature		80	°C
Weight		175	g
		-	

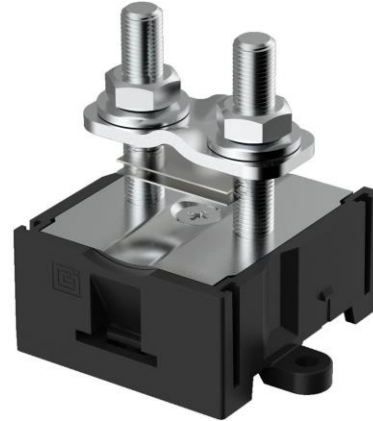

Standards	EN 60947-7-1:2009
Color / Material	Black PA base, Steel connector
Mounting / Connection	DIN-rail and screw mounting

Description

Distribution blocks are designed for branching and connecting Cu conductors in distribution boards and equipment. Branching blocks are easy to install. All models can be mounted with screws or on DIN-rail.

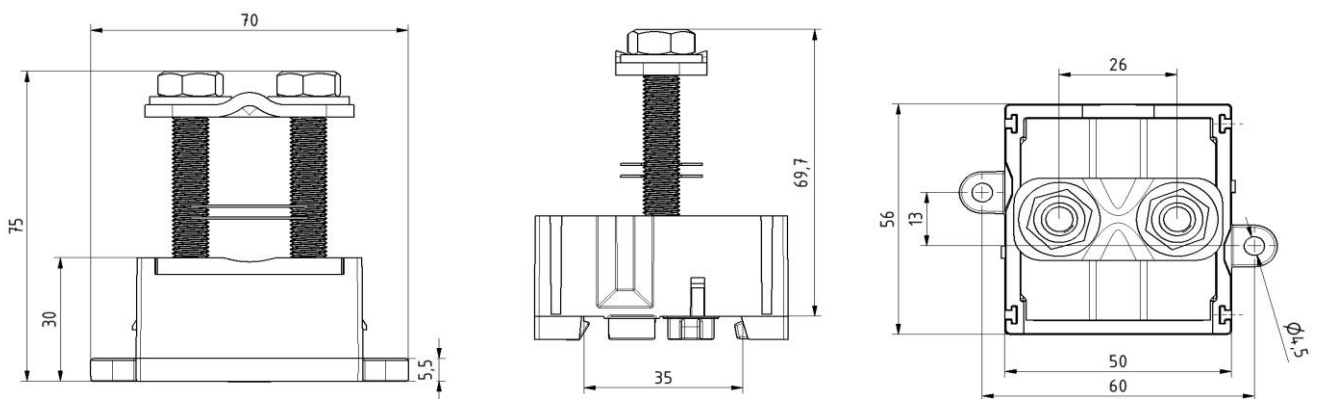Drawing

Package

Package	Box	Pcs / Package	15	Weight [kg]	2,74
Length [mm]	300	Width [mm]	205	Height [mm]	100

Ouneva Oy

Teollisuustie 21
 FI-82730 Tuupovaara
 Finland

Tel. +358 400 179 750
info@ouneva.fi

www.ounevagroup.fi
www.ounevaproducts.fi