

DATA SHEET

FARGO



Fargo UGR<19 Backlit LED Panel 600x600
HO 840

High Quality LED Panel
Back Lit LED Technology
3-Pole Connector Block For Easy Installation



GENERAL INFORMATION	
Product Code	NFO/UGR19/66/HO/840
Product Range	Fargo
Product Category	LED Panels
Fixing Method	Recessed
IP Rating	40
IK Rating	N/A
Warranty	5 Years 20000 Hours
DIMENSION/WEIGHT	
Dimensions (W x H x D) (mm)	W=595, H=595, D=32
Cut-out Size (mm)	N/A
Product Weight (Kg)	N/A
CONSTRUCTION	
Body Material	Steel
Body Colour	White RAL9016
Optical Material	PS
Optical Finish	Micro Prismatic
Termination	3x2x2.5mm sq. Push In Terminal
Driver - Integral or Remote	Remote
PACKAGING	
Carton Dimensions (mm)	N/A
Quantity per Outer Carton	N/A
Total Weight incl. Carton (Kg)	N/A

LUMINAIRE PERFORMANCE	
Energy Rating	N/A
Luminaire Lumens (lm)	4150
Power Consumption (W)	40
Efficacy (l.lm/c.W)	104
Operating Temp. (Min/Max)	-20°C - 25 °C
LIGHT SOURCE	
Type	LED
Correlated Colour Temp.	4000
Colour Rendering Index (CRI)	>80
Lumen Depreciation	L70:B10 50000
SDCM	<5
ELECTRICAL INPUT	
Voltage (V)	220-240V AC
Operating Frequency	50
In Rush	<25A
Drivers per MCB*	B10=16 B16=28 C10=16 C16=28
Class	Class 2
Power Factor	>0.95
Cable Entry	Prewired
ELECTRICAL OUTPUT	
Forward Current (mA)	1000
Forward Voltage (Vf)	35.8
EMERGENCY DATA	
Mode of Operation	N/A
Battery Duration	N/A
Battery Type	N/A
Battery Specification	N/A
Ballast Lumen Factor (BLF)	N/A
DIMMING	
DALI	N/A
OTHER	N/A
Switch Dim	N/A
Corridor Function	N/A
SENSORS	
Microwave	N/A
PIR	N/A
STANDARDS/APPROVALS	
CE Marked	Yes
Certificate of Conformity	Yes
Accreditations	N/A
BARCODE	
EAN Number	5055943076907

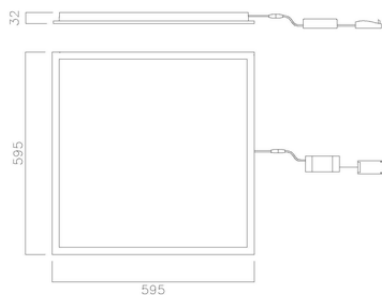

* GUIDE ONLY